

SBS

1-3/8" X 13/32" FERRULE FUSES



UNIQUE DIMENSIONS FOR TODAY'S SMALLER EQUIPMENT AND COMPONENTS

Fast-acting general purpose fuse developed in response to the industry's demand for smaller equipment and components. The only fuse in their size with a full 600 VAC rating for all ampere ratings by UL standard 248-14 and CSA No. 59.2, and are the only fuses of this size with an interrupting rating of 100kA RMS. SBS fuses are 1-3/8" long, smaller by 1/8" than most standard midget fuses and are available in 22 ampere ratings, from 2/10A to 30A. (Not for Branch Circuit Protection).

Features/Benefits

- **Small unique physical size** for maximum design flexibility and non-interchangeability with other fuse classes
- **Fiberglass body** provides dimensional stability in harsh industrial environments

*Can be used with ULTRASAFE fuse holder

HIGHLIGHTS:

- Fast Acting
- General Purpose
- Unique Dimensions

APPLICATIONS:

- Control Circuits
- Lighting Ballasts
- Meter Circuits
- Electronic Circuits

Ratings

- **AC:** 2/10 to 30A
600VAC, 100kA I.R.

Approvals




- UL Listed to Standard 248-14 file E33925
- CSA Certified to Standard C22.2 No. 248.14

Standard Fuse Ampere Ratings, Catalog Numbers

AMPERE RATING	CATALOG NUMBER	AMPERE RATING	CATALOG NUMBER	AMPERE RATING	CATALOG NUMBER
2/10	SBS2/10	1-8/10	SBS1-8/10	10	SBS10
4/10	SBS4/10	2	SBS2	12	SBS12
1/2	SBS1/2	3	SBS3	15	SBS15
3/4	SBS3/4	4	SBS4	20	SBS20
8/10	SBS8/10	5	SBS5	25	SBS25
1	SBS1	6	SBS6	30	SBS30
1-1/2	SBS1-1/2	7	SBS7		
1-6/10	SBS1-6/10	8	SBS8		

Cross Reference: SBS will replace Bussmann BBS, Littelfuse BLS fuses

Peak Let-thru Current Data – 3/4 - 30 Amperes, 600 Volts AC

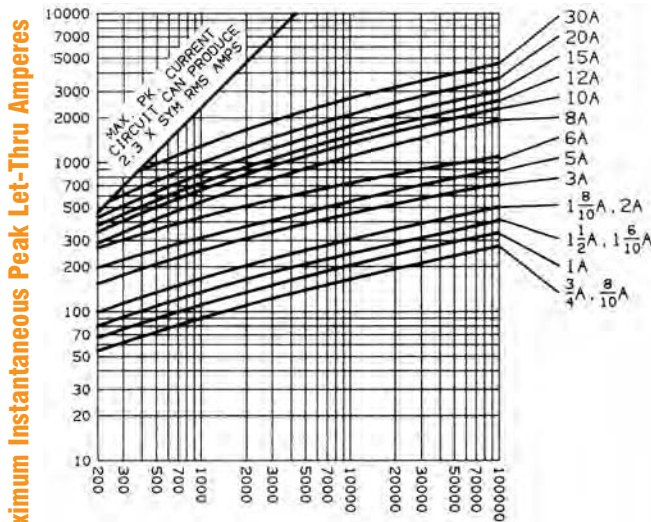

Available Current in RMS Symmetrical Amperes

Melting Time – Current Data – 2/10 - 30 Amperes, 600 Volts AC

