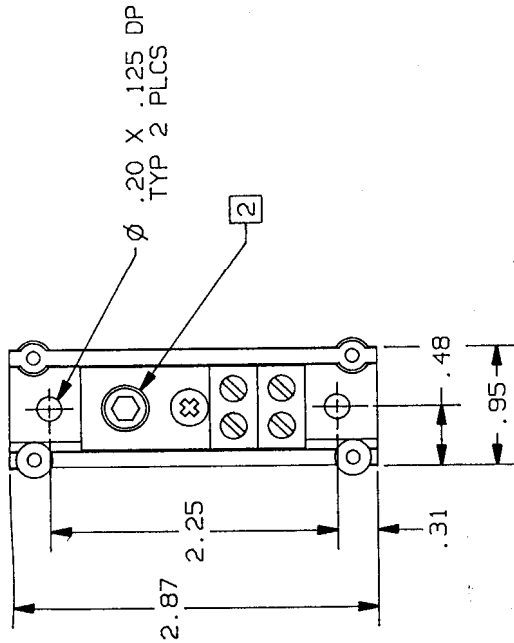


3. (1) 2/0-#14 X (4) #4-14 1 POLE 600V

2 P/N 62131 USES SLOTTED SET SCREW
P/N 63131 USES HEX SET SCREW

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.
NOTES: UNLESS OTHERWISE SPECIFIED

REFERENCE

APR 2 8 1992

P/N 62131 (CU-ONLY)
P/N 63131 (CU-AL)

REV	DATE	EDD	DESCRIPTION	BY	CK
00	4/28/72	2-00	RELEASED	7/1	60

P/N	WIRE RANGE & TORQUE (IN-LBS)						U L		CSA
	PRIMARY			SECONDARY			FILE NO.	GUIDE NO.	
	RANGE	TORQUE	RANGE	TORQUE					
62131	2/0-#14	2/0-#3	50	#4-#14	#4-#6	35	E73571	XCFR2	LR69363
		#4-#6	45		25				
		#8	40						
		#10-#14	35		#10-#14 20				
63131	2/0-#14	2/0-#6	120	#4-#14	#4-#6	35	E73571	XCFR2	LR69363
		#8-#14	50		#8	25			
					#10-#14 20				

GOULD INC.
CIRCUIT PROTECTION DIV.
DUNN ST.
KDS
4/92
GO
SCALE: NONE
REF: 00000000

DESIGNED BY: KDS
DATE: 4/92
SCALE: NONE
REF: 00000000

DESIGNATION NO. & REVISION
05B0389
PDB