



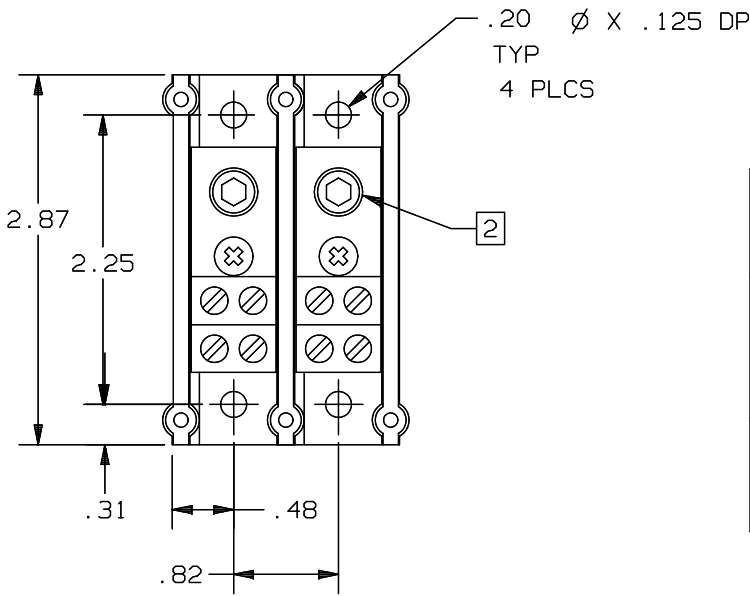


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA		
	PRIMARY		SECONDARY						
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	LUIDE NO.	REPORT NO.		
62132	2/0-#14	2/0-#3	50	#4-#14	#4-#6	35	E73571	XCFR2	LR69363
		#4-#6	45		#8	25			
		#8	40		#10-#14	20			
		#10-#14	35						
63132	2/0-#14	2/0-#6	120	#4-#14	#4-#6	35	E73571	XCFR2	LR69363
		#8-#14			#8	25			
					#10-#14	20			

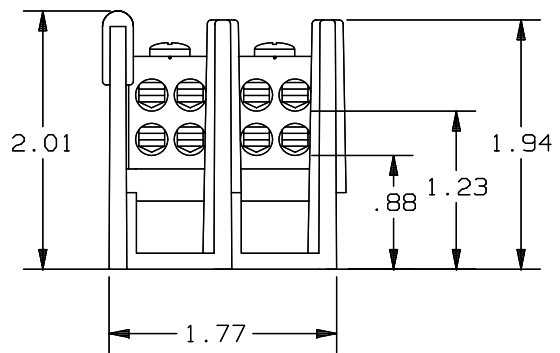

3. (1)2/0-#14 X (4)#4-#14 2 POLE 600V
- 2 P/N 62132 USES SLOTTED SET SCREW
P/N 63132 USES HEX SET SCREW.
1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.
- NOTES: UNLESS OTHERWISE SPECIFIED

P/N 62132 (CU ONLY)
P/N 63132 (CU-AL)