

REV	DATE	ECO	DESCRIPTION	BY	CK
00	5/92		RELEASED	BM	GO

.20 Ø X .125 DP
TYP 6 PLCS



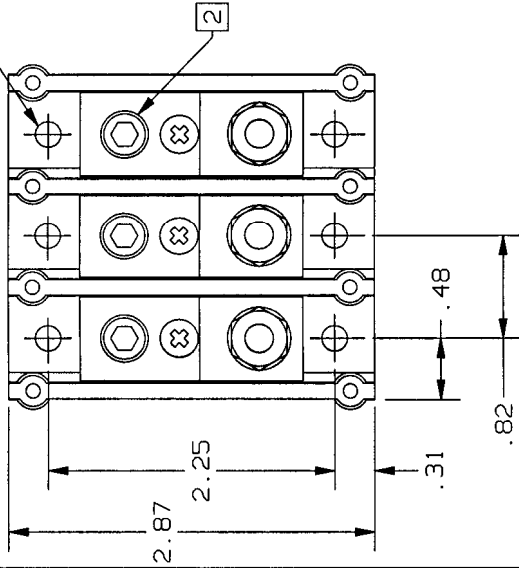


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL	FILE NO.	GUIDE NO.	CSA	STUD LENGTH
	PRIMARY		SECONDARY						
	RANGE	TORQUE	RANGE	TORQUE					
62143	2/0-#14	2/0-#3	50	1/4-11/16	72	E73571	XCFR2	LR69363	11/16
		#4-#6	45						
		#8	40						
		#10-#14	35						
63143	2/0-#14	2/0-#6	120	1/4-5/8	72	E73571	XCFR2	LR69363	5/8
		#8-#14	50						

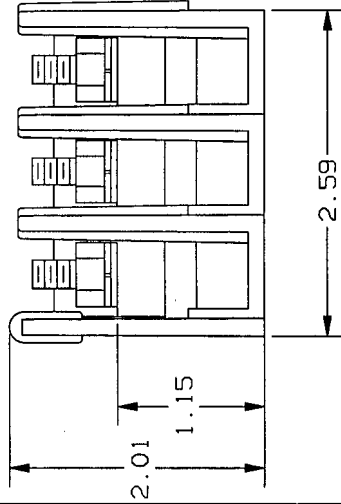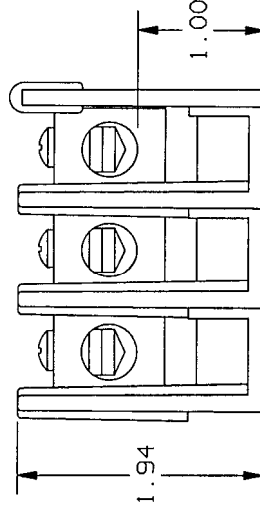

P/N 62143 (CU ONLY)
P/N 63143 (CU-AL)

GOULD		CIRCUIT PROTECTION DIV.		P.O. BOX 728 MABLE FALLS, TX 76864	
DRN BY:	KDS	DATE:	4/92	INT. REL.	92-055
CHECKED BY:		DATE:		SCALE:	NONE
DESCRIPTION				IDENTIFICATION NO. & REVISION	
PDB				05B0296	

3. (1)2/0-#14 X (1)1/4 STUD 3 POLE 600V

[2] P/N 62143 USES SLOTTED SET SCREW
P/N 63143 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING: BASE-THERMOPLASTIC 125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED