
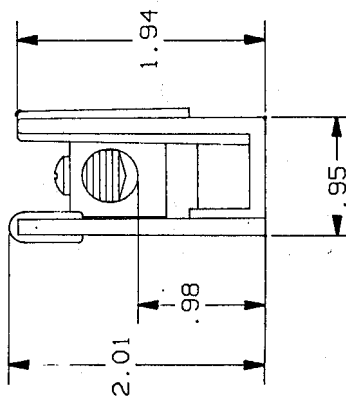
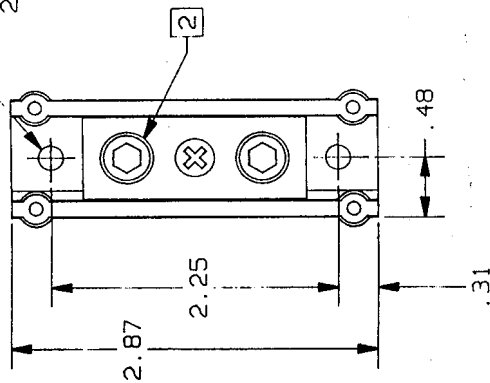




3. (1) 2/O-#14 X (1) 2/O-#14 1 POLE 600V

- 2 P/N 62151 USES SLOTTED SET SCREW
P/N 63151 USES HEX SET SCREW.

1. MATERIAL COMPOSITION AND RATING:
BASE-THERMOPLASTIC 125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)						UL			CSA
	PRIMARY			SECONDARY			FILE NO.	GUIDE NO.	REPORT NO.	
	RANGE	TORQUE		RANGE	TORQUE					
		#2/0-#3	#4-#6		#2/0-#3	#4-#6				
62151		#2/0-#14	50		#2/0-#14	#2/0-#3	50	E73571	XCFR2	LR69363
	45		#4-#6	45						
	40		#8	40						
	35		#10-#14	35						
63151	#2/0-#14	120	#2/0-#14	#2/0-#6	120	E73571	XCFR2	LR69363		
		50		#8-#14	50					

REFERENCE

JUN 10 1992

P/N 62151 (CU ONLY)

P/N 63151 (CU-AL)

	GOULD	SOLD IN U.S.	728	TX 78864
	CIRCUIT PROTECTION DIV.	FARLEE FALLS, TX 78864		
DRAWN BY:	KDS	DATE:	6/92	QTY: 100
CHECKED BY:		DATE:		SCALE:
DESCRIPTION	p08	NONE		