
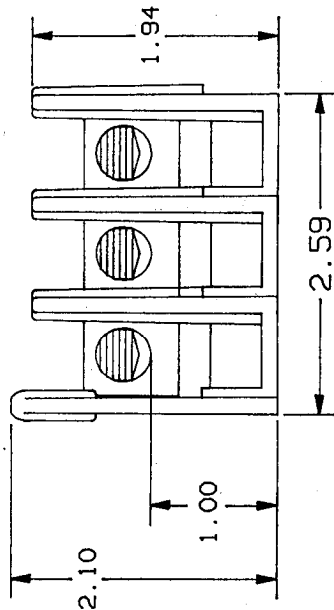


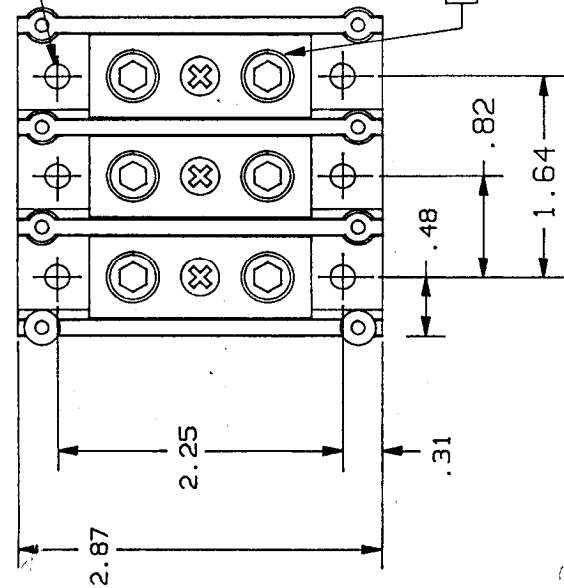

2 P/N 62153 USES SLOTTED SET SCREW

P/N 63153 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	APPD
01	REVISED PER ECO 91-051	11/91	01

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L		CSA	
	PRIMARY		SECONDARY					
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.		
	REPORT NO.							
62153	2/0-#14	2/0-#3	50	2/0-#3	50	E73571	XCFR2	LR69363
		#4-#6	45	#4-#6	45			
		#8	40	#8	40			
		#10-#14	35	#10-#14	35			
63153	2/0-#14	2/0-#6	120	2/0-#6	120	E73571	XCFR2	LR69363
		#8-#14	50	#8-#14	50			

P/N 62153 (CU ONLY) REFERENCE
MAR 16 1992
P/N 63153 (CU-AL)

GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		PRODUCT INFO TITLE PDB, (1)2/0-#14 X (1)2/0-#14 3 POLE 600V	
MATERIAL SEE NOTE 1 FINISH N/A		DATE 8/90	
NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DMG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX+.0005; XXX+.005; XX+.01; X+.04; X/X±1/32; ANGLES ±0°30'		THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.	
ASSY DMG USED ON	REF OR SIM DMG	DRWN CW	DATE 8/90
ENGR GO	APPD BM	DMG NO 05B0366	REV 01
SCALE NONE	FILE NO	SHEET 1 of 1	