


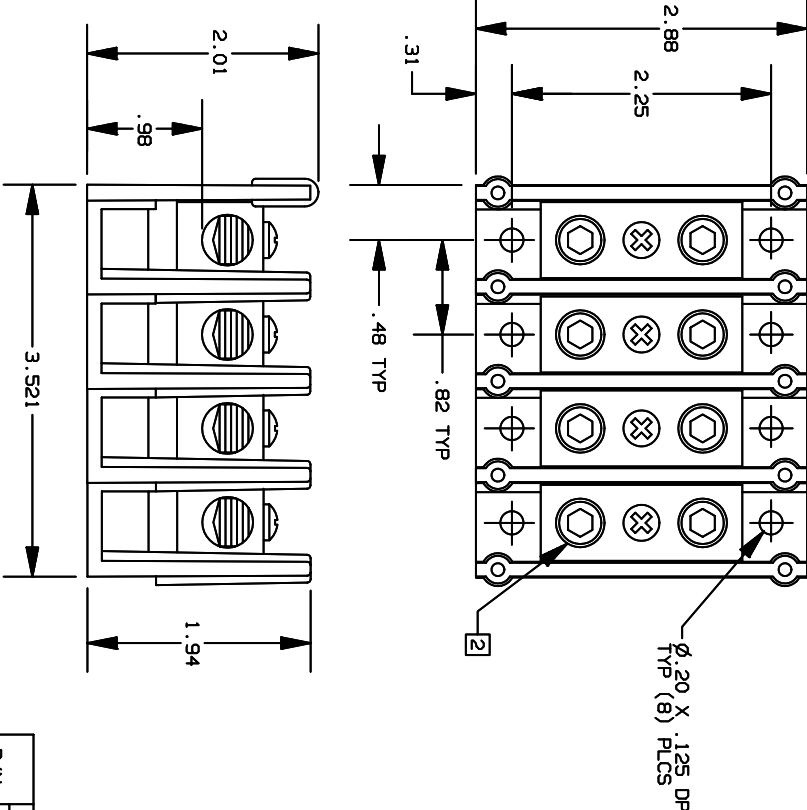

- 3. (1) 2/0-#14 X (1) 2/0-#14 4 POLE 600V
- 2 P/N 62154 USES SLOTTED SET SCREW
P/N 63154 USES HEX SET SCREW.
- 1. MATERIAL COMPOSITION AND RATING:
BASE-THERMOPLASTIC 125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

ASIZE-OUTLINE-LASER

TABLE 1

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY		SECONDARY				
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.	REPORT NO.
62154	#2/0-#14	#2/0-#3 50	#2/0-#14	#2/0-#3 50	E73571	XCFR2	LR69363
		#4-#6 45		#4-#6 45			
		#8 40		#8 40			
63154	#2/0-#14	#10-#14 35	#2/0-#14	#10-#14 35	E73571	XCFR2	LR69363
		#2/0-#6 120		#2/0-#6 120			
		#8-#14 50		#8-#14 50			

P/N 62154 (CU ONLY)
P/N 63154 (CU-AL)

POWER DISTRIBUTION
BLOCK