



REV	DATE	ECO	DESCRIPTION	BY	CK
00	5/92		RELEASED	90	20

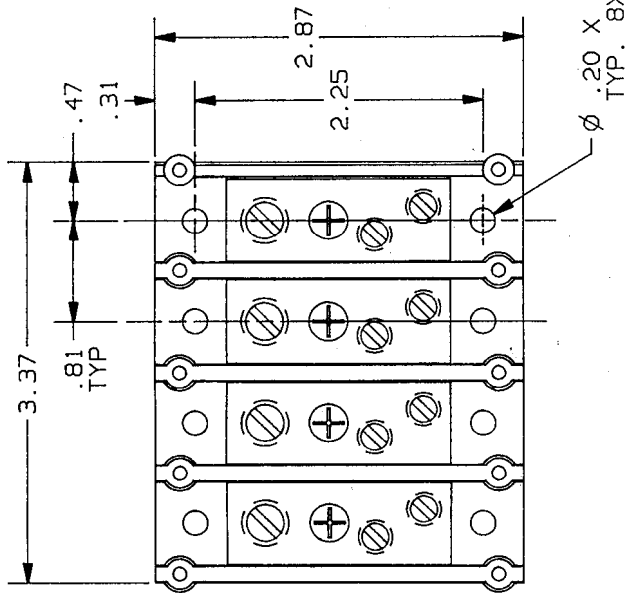

P/N	WIRE RANGE & TORQUE (IN-LBS)						UL	FILE NO.	GUIDE NO.	REPORT NO	CSA
	PRIMARY			SECONDARY							
	RANGE	TORQUE	RANGE	TORQUE	TORQUE	TORQUE					
62194	2/0-#14		2/0-#3	50			#2-#3	50	E73571	XCFR2	LR69363
			#4-#6	45			#4-#6	35			
			#8	40			#8	25			
			#10-#14	35			#10-#14	20			

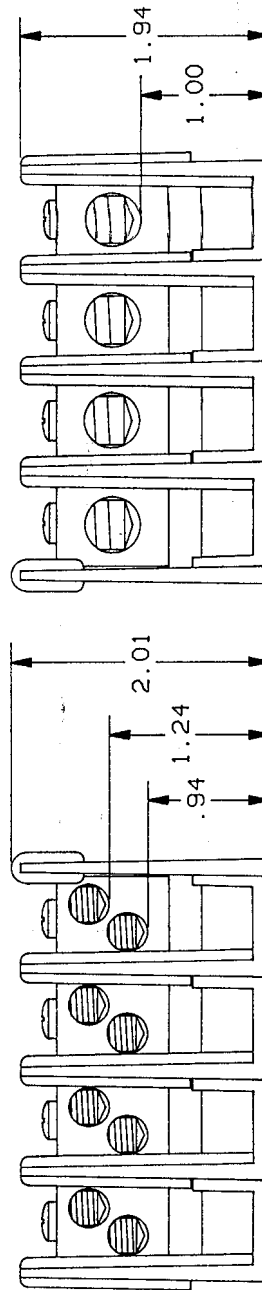

REFERENCE
MAY 21 1992

P/N 62194

GOULD CIRCUIT PROTECTION DIV. 728 N. W. 78th ST. MIAMI, FL 33154		TO ORDER: TO BE APPLIED UNDER THE FOLLOWING CONDITIONS: 1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. 2. ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSIONED PART. 3. ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSIONED PART. 4. ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSIONED PART. 5. ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSIONED PART.	
DRAWN BY: KDS DATE: 4/92	CHECKED BY: KDS DATE: 4/92	SCALE: 1:1 NONE	IDENTIFICATION NO.: 05B0233

2. (1) 2/0-#14 X (2) #2-#14 4 POLE 600V CU ONLY
1. MATL COMPOSITION AND RATING: BASE-THERMOPLASTIC 125°C RTI
- CONNECTOR- COPPER ALLOY-TIN PLATED
- NOTES: