


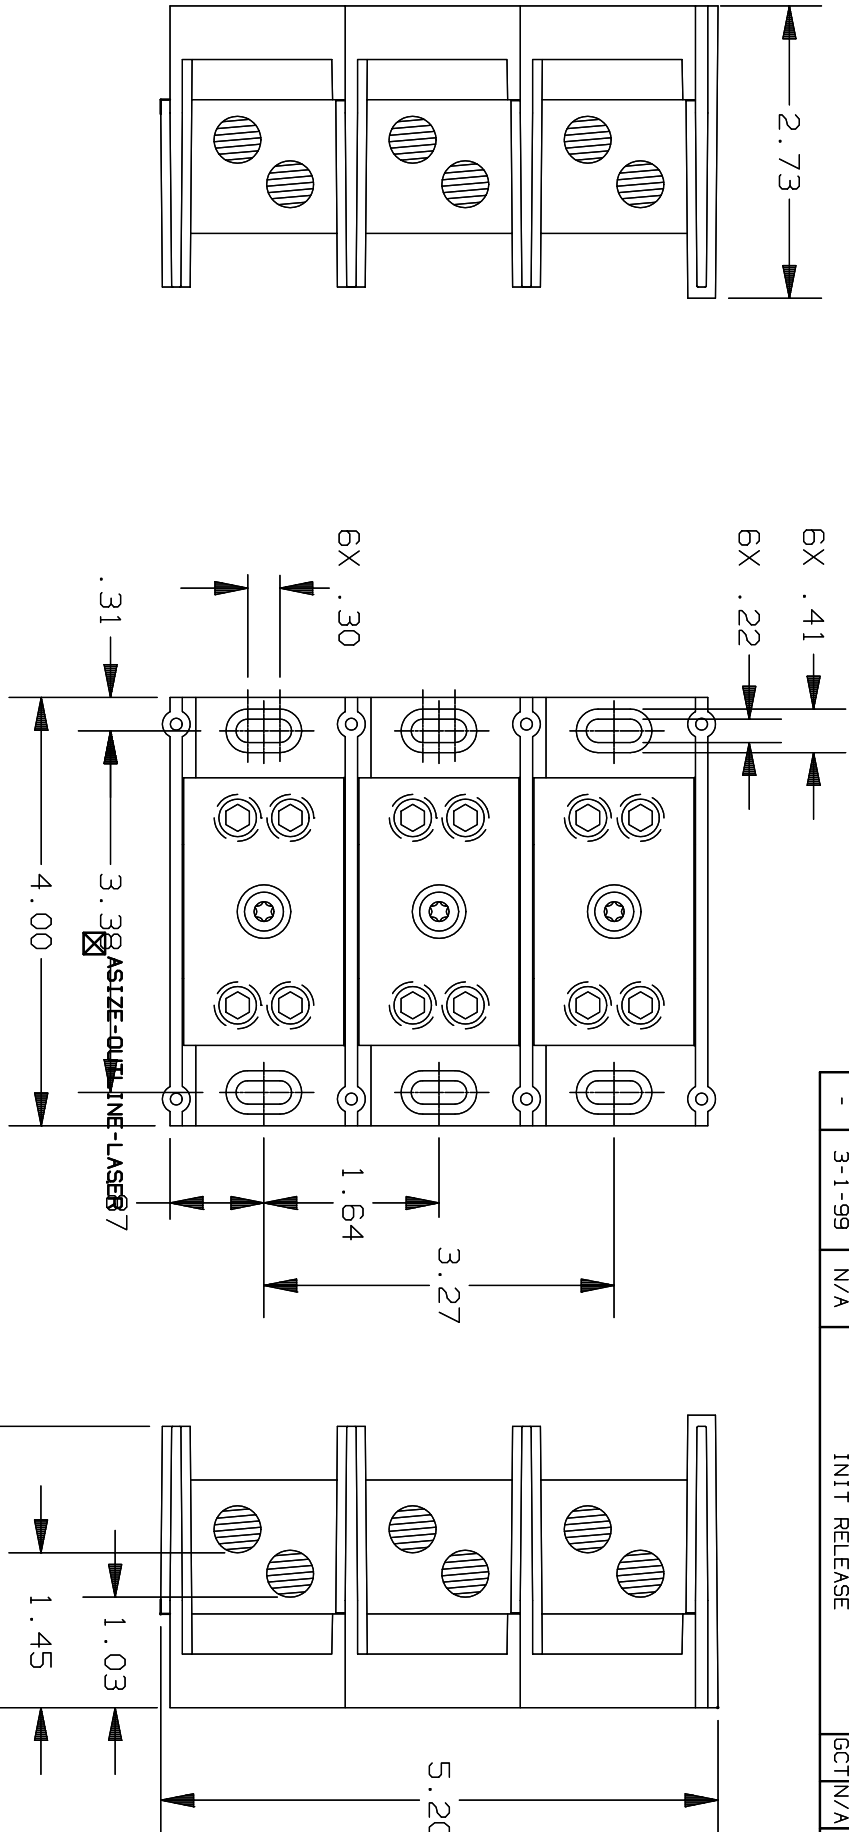

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL			CSA
	PRIMARY		SECONDARY					
	RANGE	TORQUE	RANGE	TORQUE	FILE #	GUIDE #	REPORT #	
66023	2/0-#14	2/0-#3	50	2/0-#3	50	E73571	XCFR2	LR69363
		#4-#6	45	#4-#6	45			
		#8	40	#8	40			
		#10-#14	35	#10-#14	35			
67023	2/0-#14	2/0-#6	120	2/0-#6	120	E73571	XCFR2	LR15469
		#8-#14	50	#8-#14	50			

NOTES:

1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED
2. TOLERANCES ARE ±.01 UNLESS OTHERWISE SPECIFIED.

P/N 66023 {CU ONLY}
67023 {CU-AL}

POWER DISTRIBUTION BLOCK

(2) 2/0-#14 X (2) 2/0-#14
3 POLE 600V

700421