

REV	DESCRIPTION	DATE	APPD
0	RELEASED	7/2/83	101


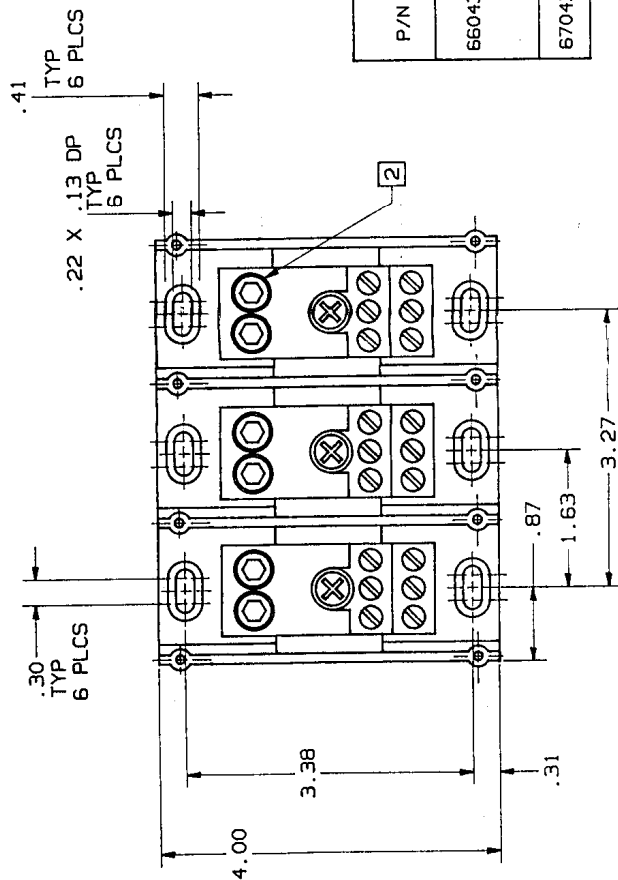


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L		CSA		
	PRIMARY		SECONDARY						
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.	REPORT NO.		
66043	2/0-#12	2/0-#3	50	#4-#14	E73571	XCFR2	LR69363		
		#4-#6	45					#8	
		#8	40					#10-#14	35
		#10-#12	35					#4-#8	40
67043	2/0-#12	#2/0-#6	120	#4-#14	E73571	XCFR2	LR15469		
		#8-#12	50					#10-#14	35

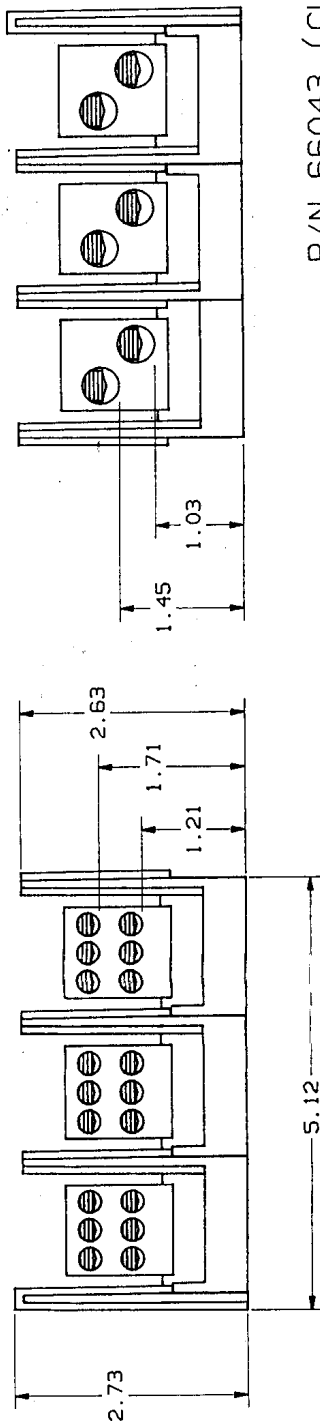

P/N 66043 (CU ONLY)
P/N 67043 (CU-AL)

REFERENCE

MAR 1 1992

2. P/N 66043 USES SLOTTED SET SCREW
P/N 67043 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - DIMENSIONS IN PARENTHESES ARE FOR INFORMATION ONLY - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES ADDITIONAL .005, .003, .005 - SEE NOTE 1 FOR DIMENSIONS		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 128 MARBLE FALLS, TX 76654	
MATERIAL FINISH		TITLE PDB, (2)2/0-#12 X (6)4-#14 3 POLE 600V	
SIGNATURES DESIGNED BY: [Signature] CHECKED BY: [Signature] END		DATE 7/17/83	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL. IT MUST NOT BE COPIED OR MADE PUBLIC IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF GOULD. IT IS SUBJECT TO RETURN ON DEMAND.		Dwg No 05C0282 Rev 00	
SCALE 1/1		FILE NO 101	