

REV	DESCRIPTION	DATE	APPRO
0	RELEASED	4/2/80	CO
01	REVISED PER ECO 90-023	12/23/80	HA

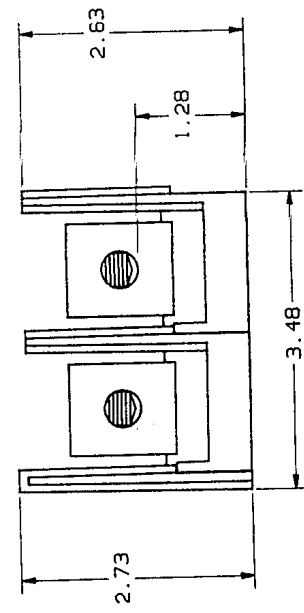
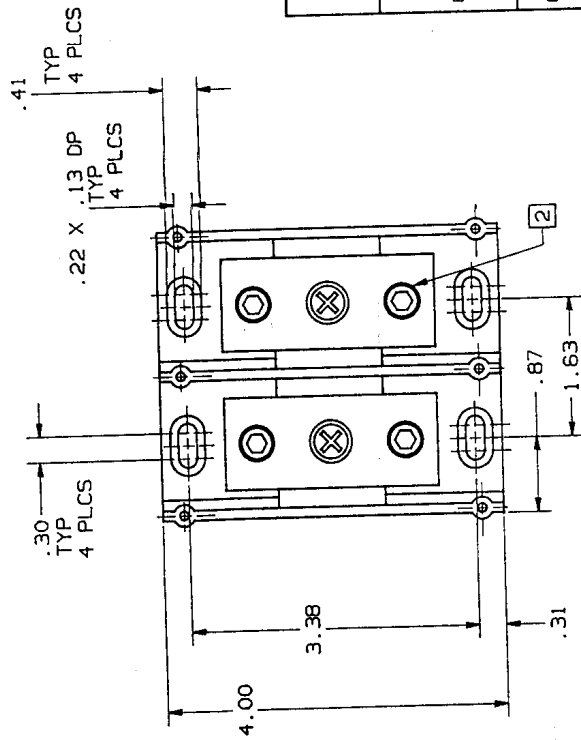


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L		CSA
	PRIMARY		SECONDARY				
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.	
66052	2/0-#12	50		2/0-#3 50	E73571	XCFR2	LR69363
				#4-#6 45			
			2/0-#12	#8 40			
				#10-#12 35			
67052	2/0-#12	120		2/0-#6 120	E73571	XCFR2	LR15469
				#8-#12 50			

REFERENCE
MAR 16 1992
P/N 66052 (CU ONLY)
P/N 67052 (CU-AL)

GOULD SHAWMUT BOX 729 MARBLE FALLS, TX 76654		TITLE PDB (1)2/0-#12 X (1)2/0-#12 2 POLE 600V	
MATERIAL FINISH		SCALE 1/1	
NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: ANGLES .005 ANGLES .005 ANGLES .005		SIGNATURES DATE 4/2/80	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL AND NOT TO BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF GOULD. IT IS TO BE RETURNED TO GOULD ON DEMAND.		PART NO. 05C0274	
USED ON 1/1		SET 1-1	

2 P/N 66052 USES SLOTTED SET SCREW
 P/N 67052 USES HEX SET SCREW.
 1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
 CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.
 NOTES: UNLESS OTHERWISE SPECIFIED