

REV	DATE	ECO	DESCRIPTION	BY	CK
00	5/92		RELEASED PER ECO	MM	GD

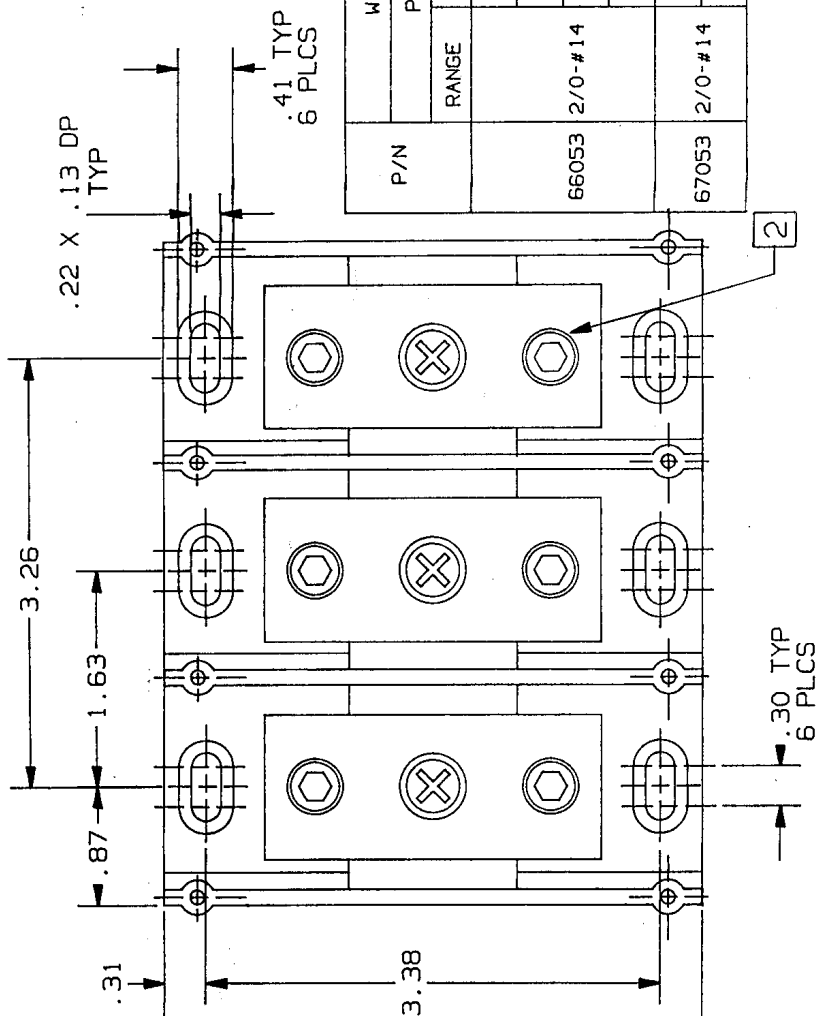


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L			CSA
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.	REPORT NO.	
	RANGE	TORQUE	RANGE	TORQUE				
66053	2/0-#14	2/0-#3	50	2/0-#14	E73571	XCFR2	LR69363	
		#4-#6	45					
		#8	40					
		#10-#14	35					
67053	2/0-#14	2/0-#6	120	2/0-#14	E73571	XCFR2	LR15469	
		#8-#14	50					

3. (1)2/0-#14 X (1)2/0-#14 600V 3 POLE


2 P/N 66053 USES SLOTTED SET SCREW
P/N 67053 USES HEX SET SCREW.

REFERENCE

JUN 12 1992

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC 125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED P/N 66053 (CU ONLY)
P/N 67053 (CU-AL)

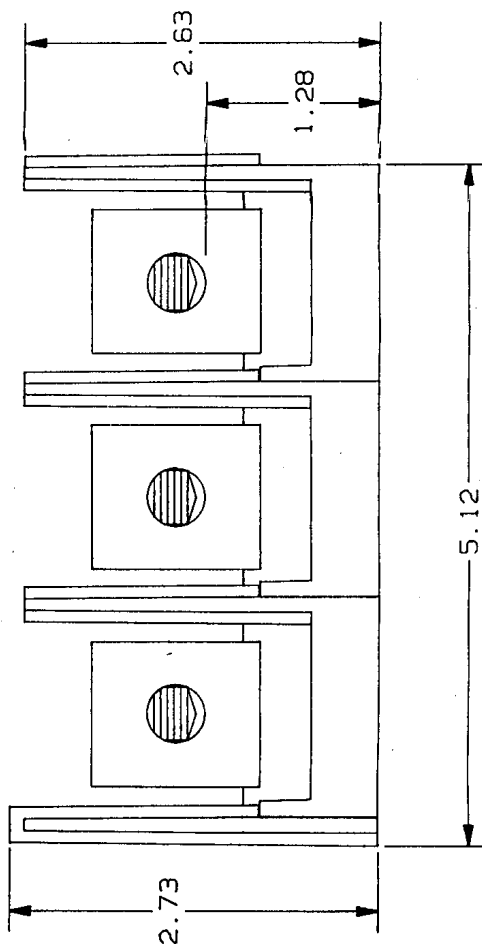

GOULD INC. 14001 W. 14TH AVE. IRVING, TEXAS 76039		TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS APPLY AFTER PLATING UNLESS OTHERWISE SPECIFIED.	
DRAWN BY: KDS DATE: 5/92	CHECKED BY: DATE: 5/92	SCALE: 92-076	REF: NONE
IDENTIFICATION NO. 1 REVISION		05B0395	