

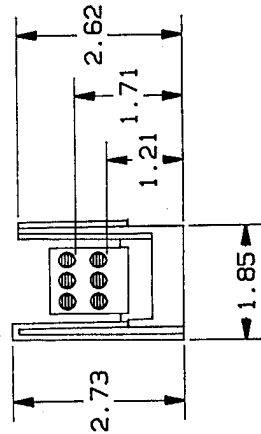


.22 X .13
DP 2 PLCS

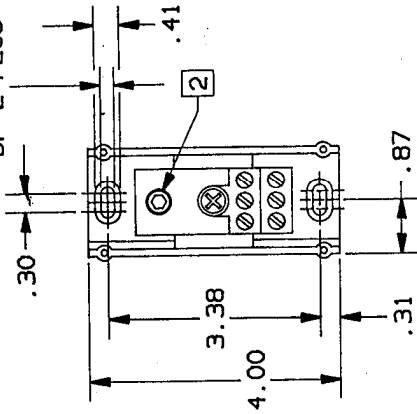

[2] P/N 66061 USES SLOTTED SET SCREW
P/N 67061 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	APPD
00	RELEASED PER ECO 92-021	2/92	PW

P/N	WIRE RANGE & TORQUE (IN-LBS)						U/L		CSA
	PRIMARY			SECONDARY					
	RANGE	TORQUE	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.	
66061	2/0-#14	2/0-#3	50	#4-#14	#4-#6	45	E73571	XCFR2	LR69363
		#4-#6	45		#8	40			
		#8	40		#10-#14	35			
		#10-#14	35		#4-#8	40			
67061	2/0-#14	2/0-#6	120	#4-#14	#4-#8	40	E73571	XCFR2	LR15469
		#8-#14	50		#10-#14	35			

REFERENCE
MAR 16 1992

P/N 66061 (CU ONLY)
P/N 67061 (CU-AL)

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DNG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; X/X±1/32; ANGLES #0° 30' THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.	MATERIAL		N/A		GOULD SHAWMUT	
	FINISH		N/A		GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
ASSY DNG USED ON	REF OR STM DNG		DATE		PRODUCT INFO	
			SIGNATURES		TITLE	
			DRWN RW	2/92	PDB: (1) 2/0-#14	
			CHKD GO	2/92	X (6) #4-#14	
			ENGR		1 POLE 600V	
			APPO BM	2/92	DNG NO 05B0379	
					SCALE NONE	
					FILE NO	
					SHEET 1 of 1	