

REV	DESCRIPTION	DATE	APPD
00	RELEASED	3/7/91	101

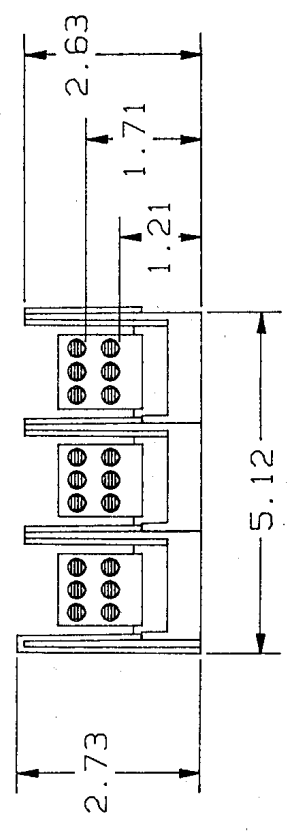
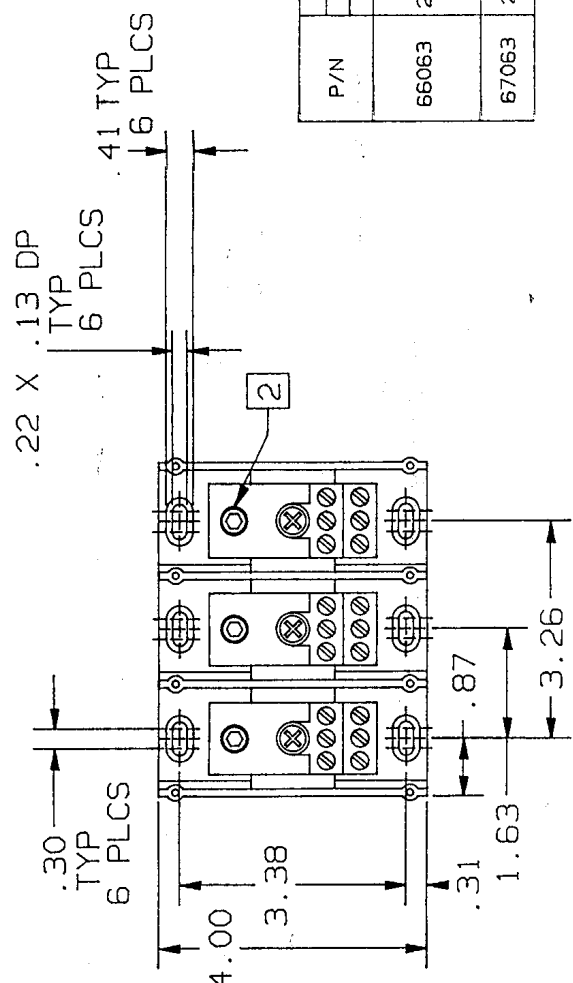


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)					U/L		CSA	
	PRIMARY		SECONDARY			FILE NO.	GUIDE NO.		
	RANGE	TORQUE	RANGE	TORQUE					
66063	2/0-#14	2/0-#3	50	#4-#14	#4-#6	45	E73571	XCFR2	LR69363
		#4-#6	45		#8	40			
		#8	40		#10-#14	35			
		#10-#14	35						
67063	2/0-#14	2/0-#6	120	#4-#14	#4-#8	40	E73571	XCFR2	LR15469
		#8-#14	50		#10-#14	35			

REFERENCE
MAR 16 1992

P/N 66063 (CU ONLY)
P/N 67063 (CU-AL)

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DNG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES ±0°30'.		MATERIAL		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		FINISH		PRODUCT INFO TITLE PDB, (1) 2/0-#14 X (6) #4-#14 3 POLE 600V	
ASST DNG USED ON	REF OR SIM DNG	SIGNATURES	DATE	DWG NO	REV
		DRN [Signature]	3/7/91	05B0325	00
		CHKD G. O. [Signature]	3/7/91	SCALE	SHEET
		ENDG		1/2	1 of 1
		APPD [Signature]	3/7/91		

P/N 66063 USES SLOTTED SET SCREW
P/N 67063 USES HEX SET SCREW.

MATL COMPOSITION AND RATING:
BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

ES: UNLESS OTHERWISE SPECIFIED