



REV	DATE	ECO	DESCRIPTION	BY	CK
00	3/92	037	RELEASED PER ECO	BM	GO
01	9/93	1215	REV UL CERT.	W	GO

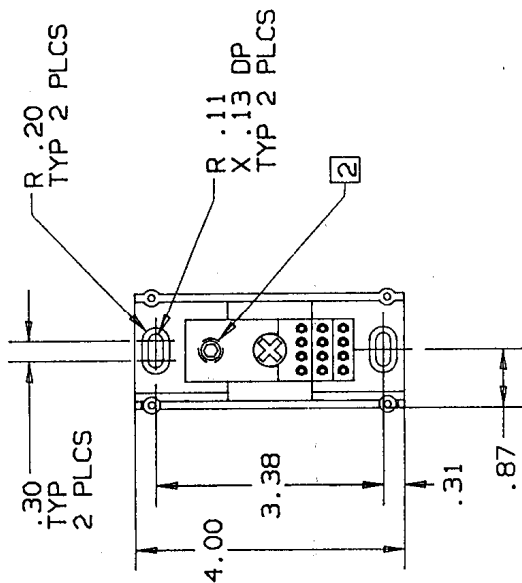

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY RANGE	TORQUE	SECONDARY RANGE	TORQUE	FILE NO.	GUIDE NO.	
66111	2/0-#14	2/0-#3	#10-#14	50			LR89363
		#4-#6		45			
		#8		40			
		#10-#14		35			
67111	2/0-#14	#2/0-#6	#10-#14	120	E73571	XCFR2	LR15469
		#8-#14		50			

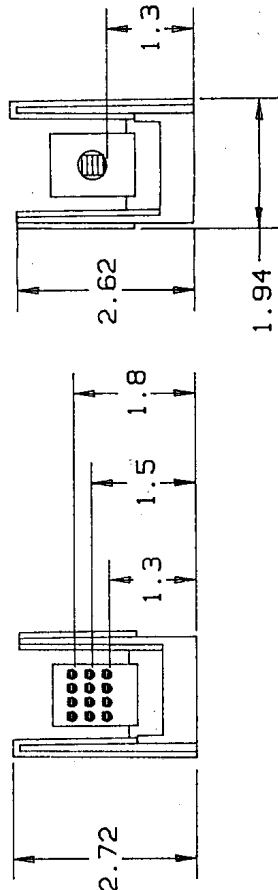

3. (1) 2/0-#14 X (6) #10-#14, 3 POLE 600V

66111 USES 3/8-24 SLOTTED SET SCREW

67111 USES 7/16-20 HEX SET SCREW

MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125 °C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

P/N 66111 (CU ONLY)

P/N 67111 (CU-AL)

10000 Newburgport
00120193

GOULD P.O. BOX 28 CINCINNATI, OH 45201-0028, TX 75084 CIRCUIT PROTECTION DIV.		REFERENCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, SPECIFIED ANGLES ARE 90°. DIMENSIONS APPLY AFTER PLATING. ALL SURFACES TO BE TYP UNLESS OTHERWISE SPECIFIED.	
DRAWN BY: BM	DATE: 3/92	UNIT: REL.	SCALE:
CHECKED BY: GH0	DATE: 3/92	NONE	REFDOC:
DESCRIPTION: PDB		IDENTIFICATION NO. & REVISION 05B0383 01	

ES: UNLESS OTHERWISE SPECIFIED