

REV	DESCRIPTION	DATE	APPRO
0	RELEASED	11/4/01	707


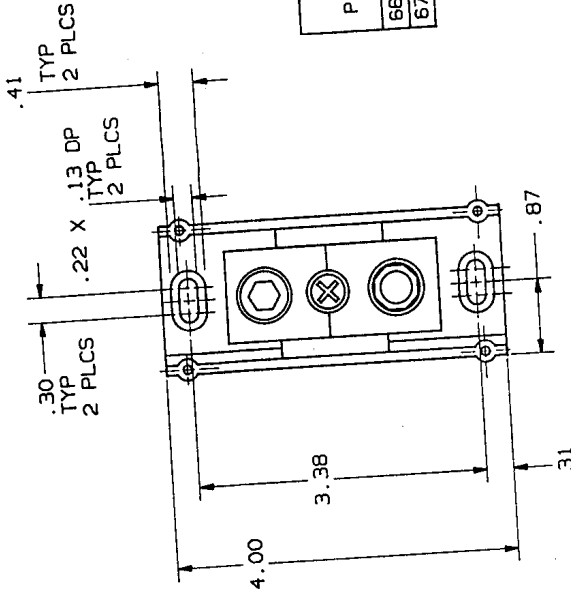


TABLE 1

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L	CSA		
	PRIMARY		SECONDARY					
	RANGE	TORQUE	RANGE	TORQUE				
66251	350-#6	275	3/8-1	3/8-1	228	E73571	XCFR2	LR69363
67251	350-#6	275	3/8-1	3/8-1	228	E73571	XCFR2	LR15469

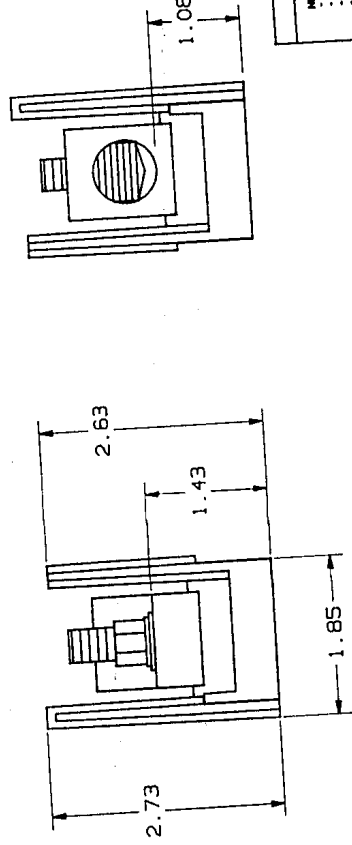

REFERENCE

MAR 16 1992

P/N 66251 (CU ONLY)
P/N 67251 (CU-AL)

GOULD SHAWMUT GOLD SHAWMUT 725 MARBLE FALLS, TX 78654		TITLE PDB, (1) 350MCM-#6 X (1) 3/8-1 STUD 1 POLE 600V	
MATERIAL FINISH NOTES: UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - DIMENSIONS ARE TO CENTER UNLESS NOTED OTHERWISE - TOLERANCES: ALL DIMENSIONS: .005 ALL ANGLES: 45°		DATE 11/4/01 DRAWN G. J. J.	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD SHAWMUT. IT IS TO BE USED FOR THE PROJECT AND NOT BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF GOULD SHAWMUT.		SCALE 1/1	
REV. OR 5TH DIAL		FILE NO. 05C0283	
DESIGNED BY 11/4/01		SHEET 1/1	

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED