

REV	DESCRIPTION	DATE	APPRO
0	RELEASED	8/24/70	


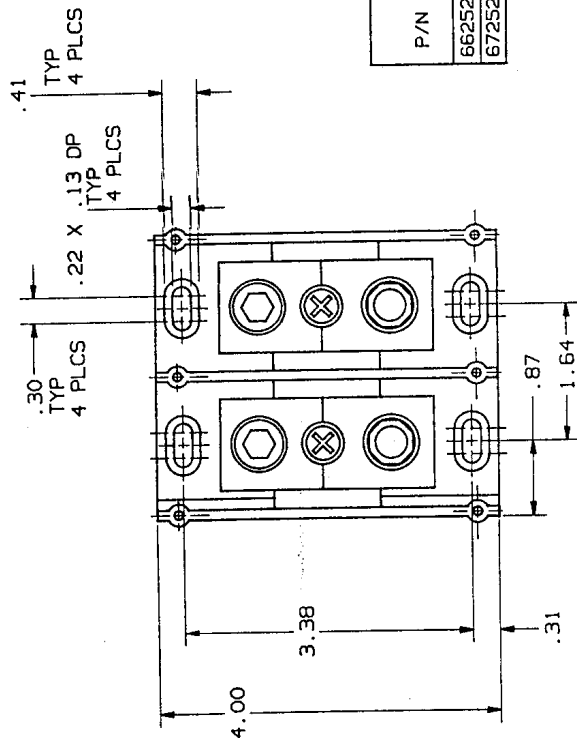


TABLE 1

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L	CSA			
	PRIMARY		SECONDARY						
	RANGE	TORQUE	RANGE	TORQUE					
66252	350-#6	350-#6	275	3/8-1	3/8-1	228	E73571	XCFR2	LR69363
67252	350-#6	350-#6	275	3/8-1	3/8-1	228	E73571	XCFR2	LR15469

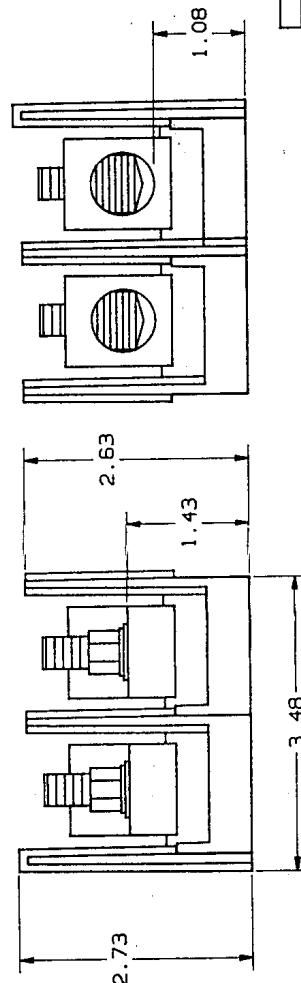

REFERENCE

MAR 1 6 1992

P/N 66252 (CU ONLY)

P/N 67252 (CU-AL)

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES: UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - REMOVE ALL BURRS AND SHARP EDGES - FINISHES MUST BE AS SPECIFIED - UNLESS OTHERWISE SPECIFIED		THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOLD. IT IS CONFIDENTIAL. IT IS TO BE KEPT IN STRICTLY CONFIDENTIAL AND IS SUBJECT TO RETURN ON DEMAND.	
GOULD SHAWMUT GOLD SHAWMUT 1000 SHAWMUT MADE IN U.S.A. MADE IN U.S.A. MADE IN U.S.A.		DATE SIGNATURE DATE SIGNATURE	
PRODUCT TYPE P08. (1)350MCM-#6 X (1)3/8-1 STUD 2 POLE 800V		SCALE 1/1	
FILE NO 05C0284		SHEET 1 of 1	