



REV	DATE	EDD	DESCRIPTION	BY	CK
00	12/92		RELEASED	nm	go

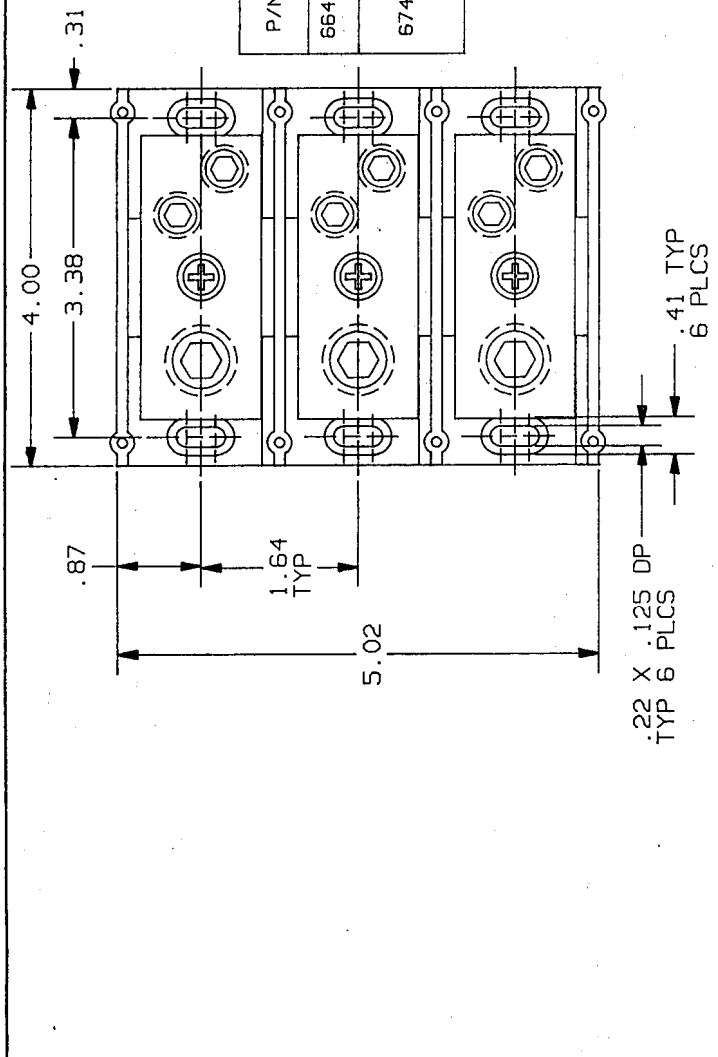

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY RANGE	PRIMARY TORQUE	SECONDARY RANGE	SECONDARY TORQUE	FILE #	GUIDE #REPORT #	
66423	500-#4	500-#4	4/0-#10	4/0-#10	150	E73571	XCFR2 LR69363
67423	500-#4	500-#4	4/0-#6	4/0-#6	150	E73571	XCFR2 LR15469
			#4		100		
			#6		80		

REFERENCE
JAN 1 9 1993

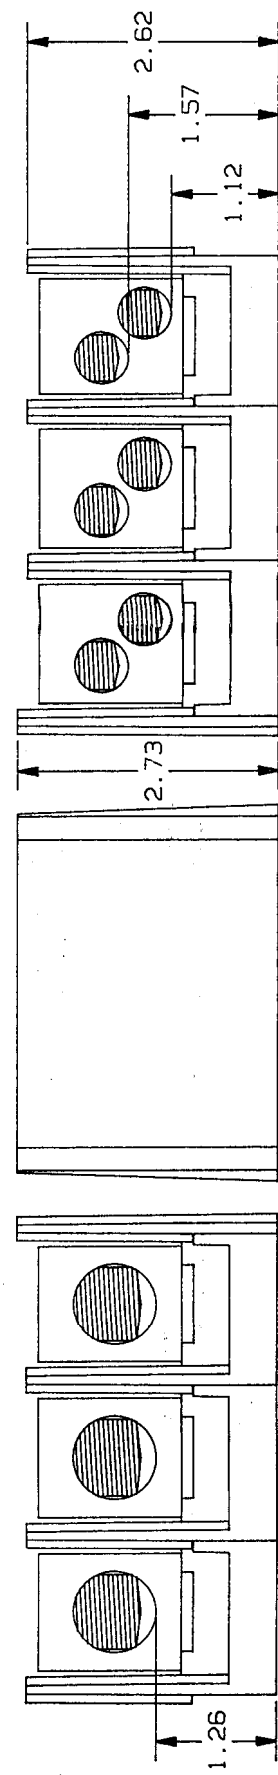

P/N 66423 (CU ONLY)
67423 (CU-AL)

2. 3 POLE, 600 VOLTS

1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC-125°C RTI
CONNECTOR - ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

GOULD GOLD INC.
CIRCUIT PROTECTION DIV.
1201 E. 17TH AVE.
DENVER, CO 80202-1001
TELEPHONE: 303.733.1000
FAX: 303.733.1001
E-MAIL: GPC@GOULD.COM
WWW.GOULD.COM

DATE: 12/92
KDS
GHD
12/92
NONE

DESIGNATION: PDB
IDENTIFICATION NO.: 05B0420
00