
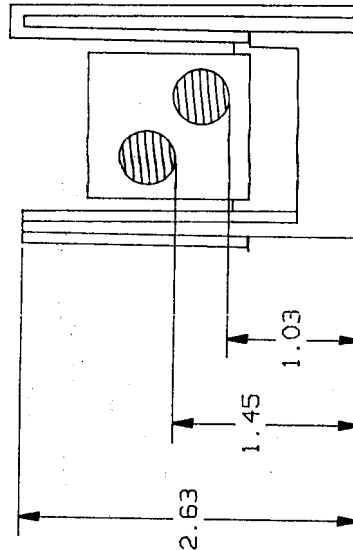
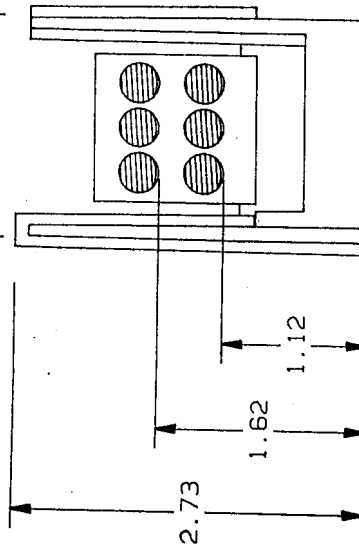


REV	DATE	ECO	DESCRIPTION	BY	CK
00	3/1/95		RELEASED	AB	

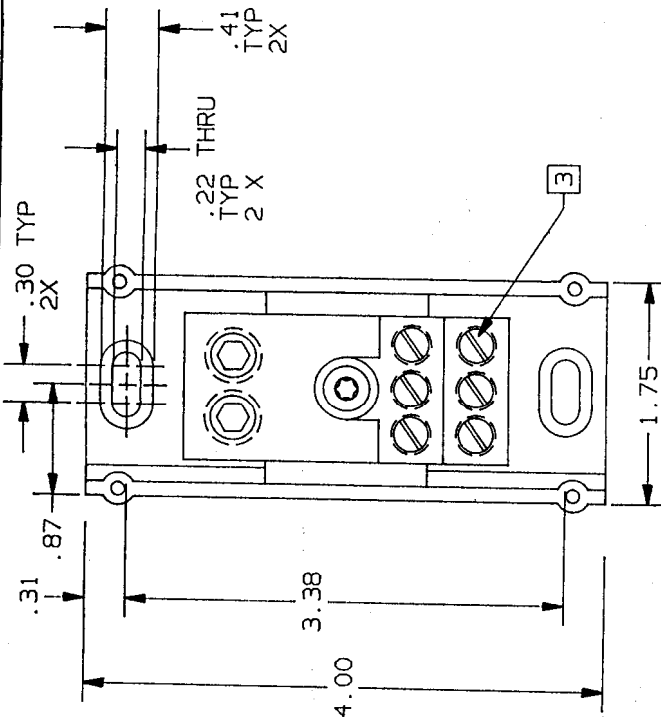

P/N	WIRE RANGE & TORQUE (IN-LBS)					UL		CSA	
	PRIMARY		SECONDARY		FILE #	GUIDE #	REPORT #		
	RANGE	TORQUE	RANGE	TORQUE					
66511	2/0-#14	2/0-#3	50	#2-#14	#2-#3	50	E73571	XCFR2	LR69363
		#4-#6	45		#4-#6	35			
		#8	40		#8	25			
		#10-#14	35		#10-#14	20			
67511	2/0-#14	2/0-#6	120	#2-#14	#2-#3	50	E73571	XCFR2	LR15469
		#8-#14	50		#4-#6	35			
					#8	25			
					#10-#14	20			

[3] P/N 66511 USES STD. SLOT DRIVER
P/N 67511 USES 3/16 SOCKET DRIVER

2. (1) 2/0-#14 X (6) #2-#14, 1-POLE, 600V.

1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED

Newburgport

P/N 66511 (CU ONLY)
67511 (CU-AL)

GOULD BULLDO INC. CIRCUIT PROTECTION DIV. DANFORTH ST. NEWBURGPORT, N.Y. 11766-0001		DATE: 3/95 BY: KDS CHECKED BY:		REF: NONE	
TOLERANCES TO BE APPLIED UNLESS OTHERWISE SPECIFIED: DIMENSIONS: .0005", .001", .002", .005", .010", .020", .050", .100", .200", .500", 1.000" ANGLES: 45°, 90°, 120°, 135°, 180° FINISH: UNLESS OTHERWISE SPECIFIED, ALL SURFACES TO BE 100% UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD BULLDO INC. AND IS TO BE USED FOR THE PURPOSES SPECIFIED HEREON. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION OF GOULD BULLDO INC.					
IDENTIFICATION NO. & REVISION 05B0510 00				PDB	