

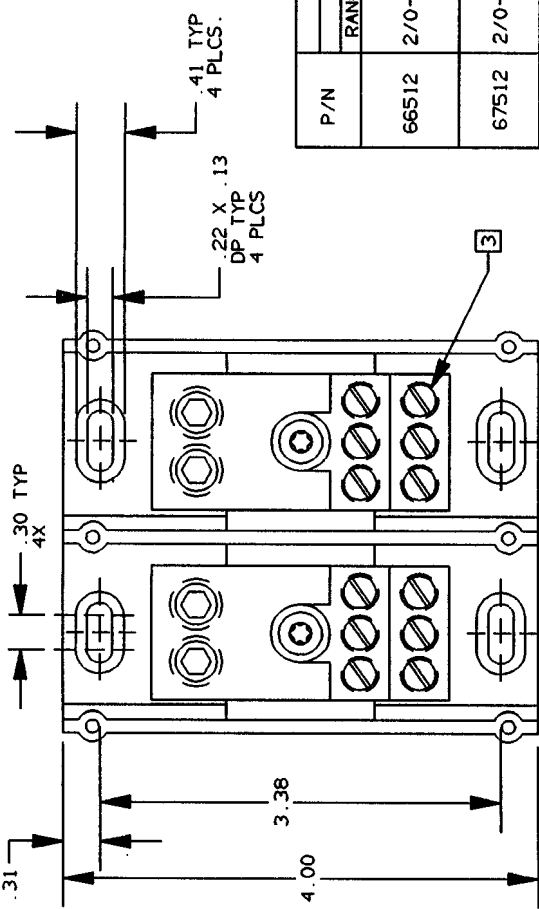


CONTROL No. :

REV	DATE	ECO	DESCRIPTION	BY	CHK	APP
-----	------	-----	-------------	----	-----	-----

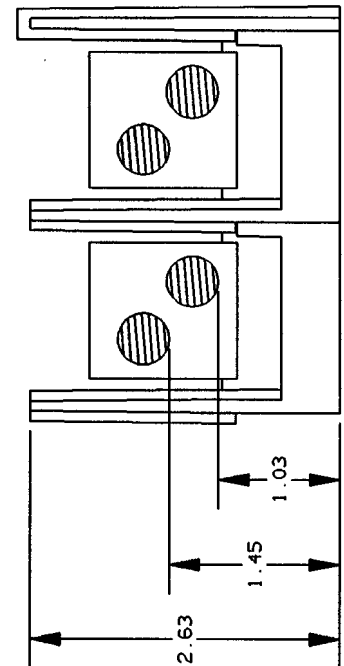

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL	CSA
	PRIMARY	SECONDARY	RANGE	TORQUE		
66512	2/0-#14	#8	2/0-#3	50	E73571	XCFR2
			#4-#6	45		
			#2-#14	40		
			#10-#14	35		
67512	2/0-#14	#8	2/0-#3	120	E73571	XCFR2
			#4-#6	120		
			#2-#14	50		
			#10-#14	20		

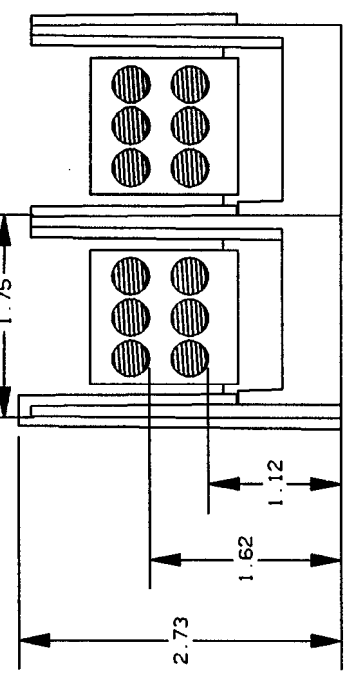

UNCONTROLLED
COPY

OCT 31 1996
P/N 66512 (CU ONLY)
67512 (CU-AL)

- [3] P/N 66512 USES STD. SLOT DRIVER
P/N 67512 USES 3/16 SOCKET DRIVER
2. (2) 2/0-#14 X (6) #2-#14, 2 POLE, 600V.
1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED
- NOTES: UNLESS OTHERWISE SPECIFIED

GOULD 374 MERRIMAC STREET
NEWBURYPORT, MA 01950

PRODUCT MANAGER
DESIGN ENGINEER
SIGN: *[Signature]*
DATE: 10-31-96

POWER DISTRIBUTION BLOCK

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

700174