



00 2/1/95 RELEASED

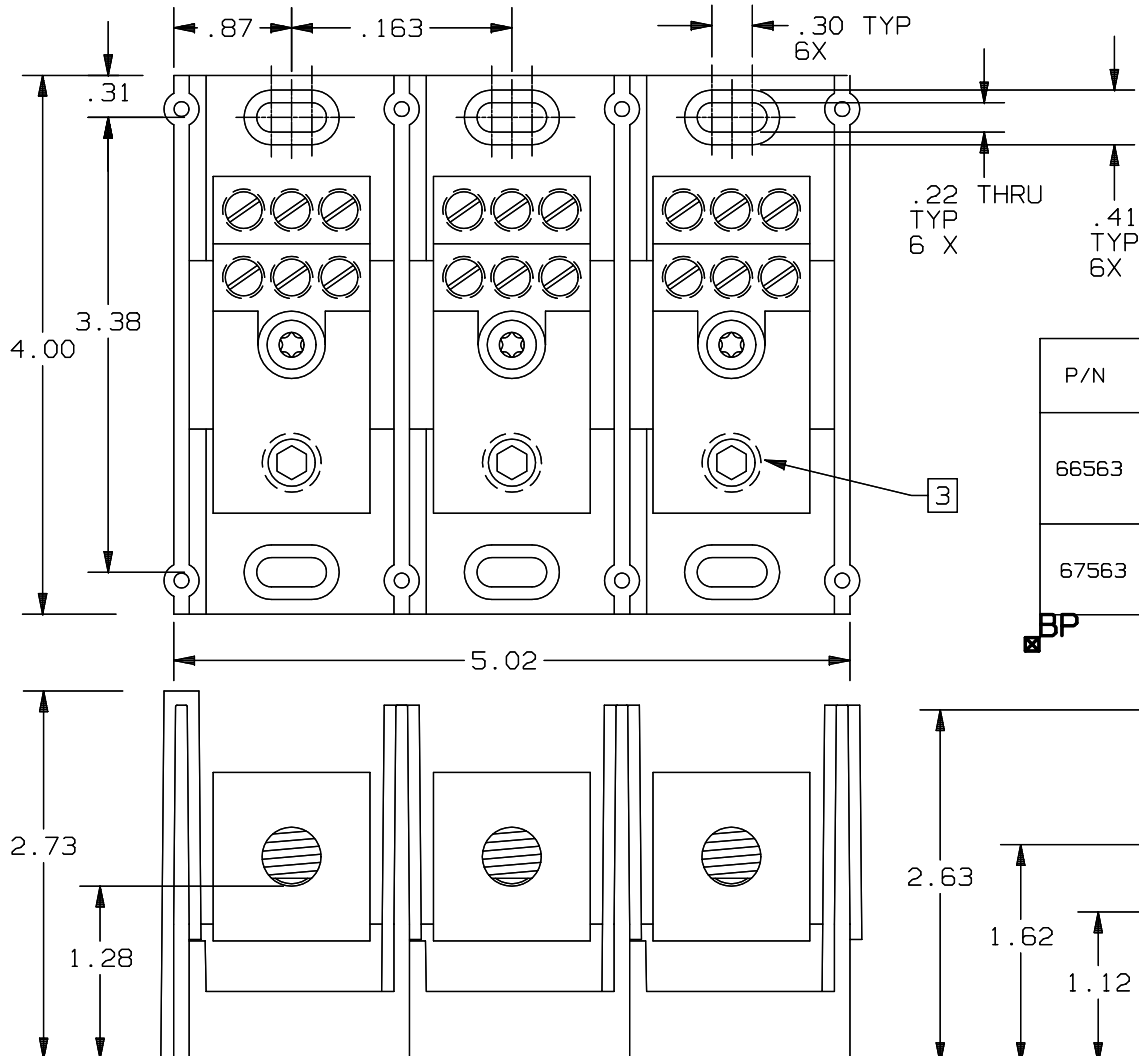

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY		SECONDARY		FILE #	GUIDE #	REPORT #
	RANGE	TORQUE	RANGE	TORQUE			
66563	2/0-#14	2/0-#3	#2-#14	#2-#3	E73571	XCFR2	LR69363
		#4-#6		#4-#6			
		#8		#8			
		#10-#14		#10-#14			
67563	2/0-#14	2/0-#6	#2-#14	#2-#3	E73571	XCFR2	LR15469
		#8-#14		#4-#6			
				#8			
				#10-#14			

BP

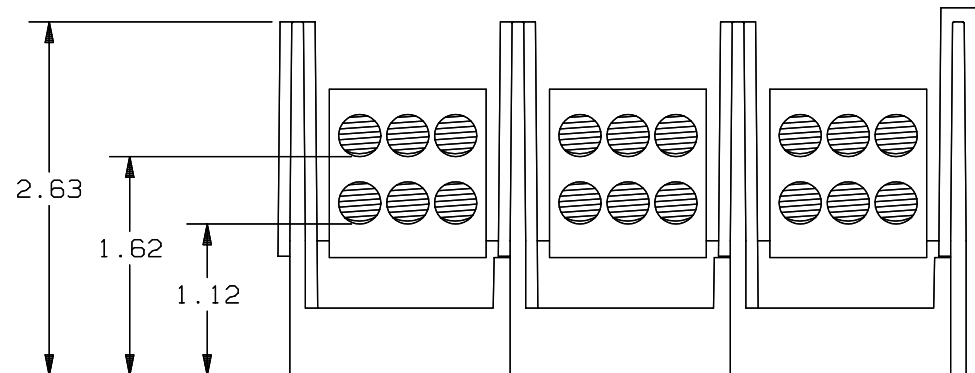

- [3] P/N 66563 USES STD. SLOT DRIVER
P/N 67563 USES 3/16 SOCKET DRIVER

2. (1) 2/0-#14 X (6) #2-#14, 3 POLE, 600V.

1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED

P/N 66563 {CU ONLY}
67563 {CU-AL}

KDS 2/95

PDB

05B0509

00