

REV	DESCRIPTION	DATE	APPO
00	RELEASED	11/91	807

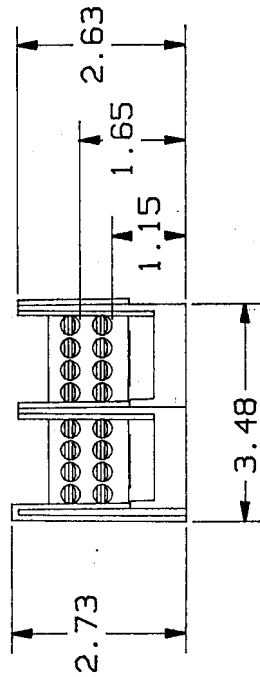
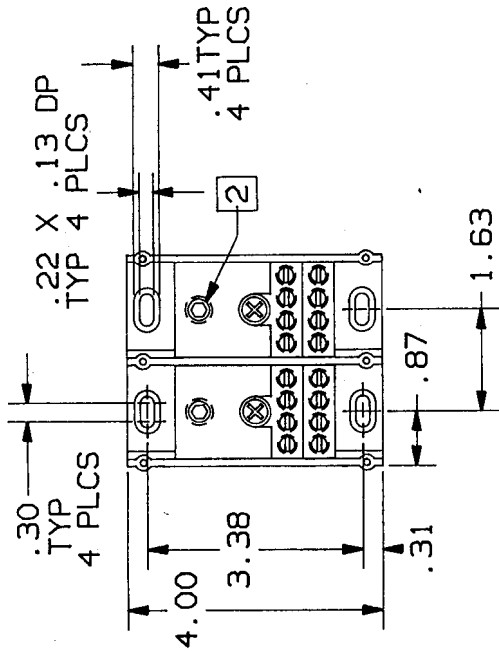


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)						U/L	FILE NO.	GUIDE NO.	REPORT NO.	CSA
	PRIMARY			SECONDARY							
	RANGE	TORQUE		RANGE	TORQUE						
66582	2/0-#14	2/0-#3	50					E73571	XCFR2	LR69363	
		#4-#6	45	#2-#14	#2-#3	50					
		#8	40		#4-#6	35					
		#10-#14	35	#8	25						
67582	2/0-#14	2/0-#6	120					E73571	XCFR2	LR15469	
		#8-#14	50	#2-#14	#2-#3	50					
					#4-#6	35					
					#8	25					

REFERENCE

MAR 16 1992

P/N 66582 (CU ONLY)
P/N 67582 (CU-AL)

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DNG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX+.0005; XXX+.005; XX+.01; X+.04; X/X+.1/32; ANGLES ±0°30'		MATERIAL SEE NOTE 1		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 76654	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		FINISH N/A		PRODUCT INFO TITLE PDB, (1) 2/0-#14 X (8) #2-#14 2 POLE 600V	
ASST DWS USED ON		SIGNATURES ORGN RW DATE 11/91 CHKO GO DATE 11/91 ENGO APPO BM DATE 11/91		DWG NO 05B0364 REV 00	
REF OR STM DNG		SCALE NONE		FILE NO 1 of 1	

2 P/N 66582 USES SLOTTED SET SCREW
P/N 67582 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED