

| REV | DESCRIPTION | DATE  | APPD       |
|-----|-------------|-------|------------|
| 00  | RELEASED    | 11/91 | <i>for</i> |


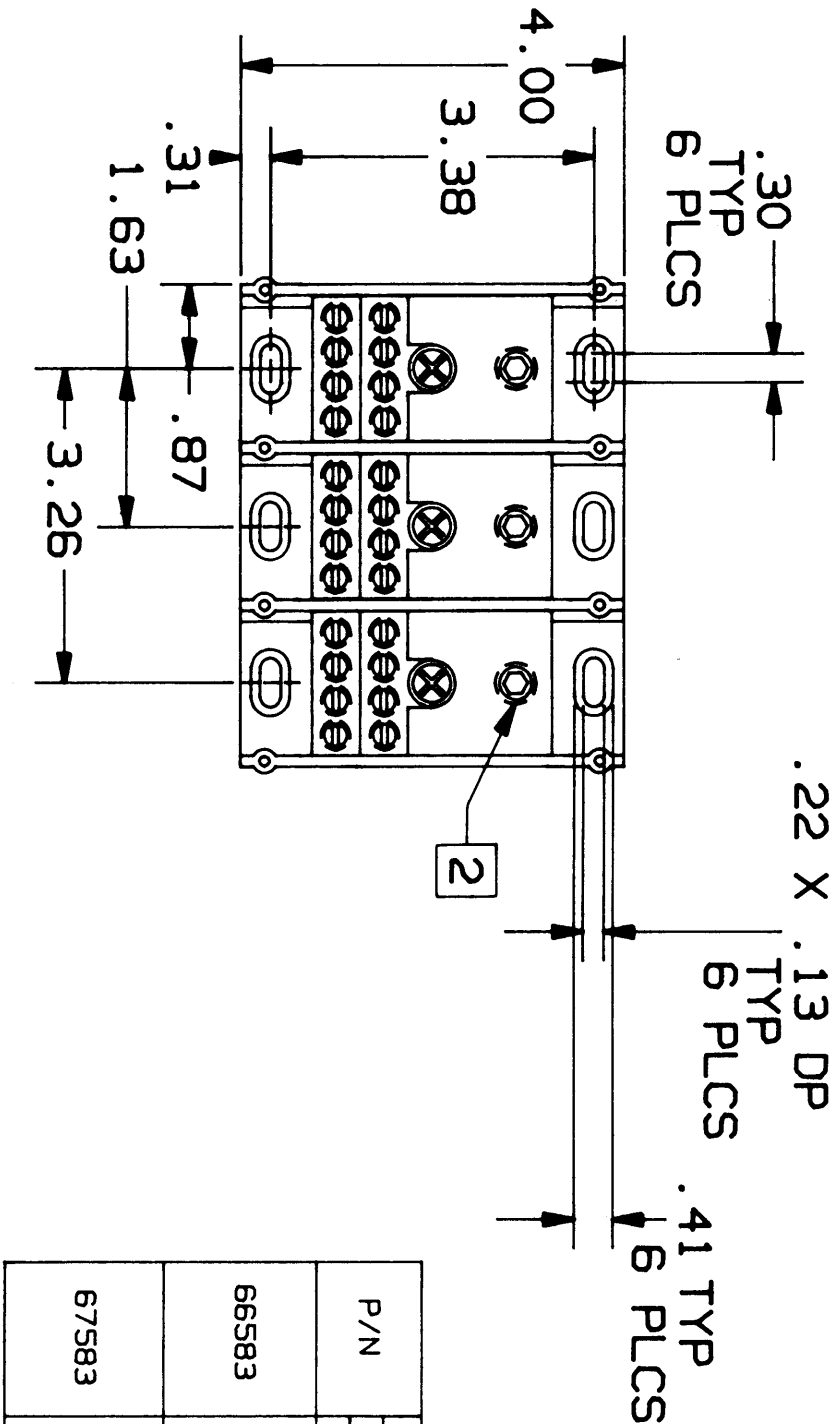


TABLE 1

| P/N   | WIRE RANGE & TORQUE (IN-LBS) |           |        |         | U/L      |           | CSA        |
|-------|------------------------------|-----------|--------|---------|----------|-----------|------------|
|       | PRIMARY                      | SECONDARY |        |         |          |           |            |
|       | RANGE                        | TORQUE    | RANGE  | TORQUE  | FILE NO. | GUIDE NO. | REPORT NO. |
| 66583 | 2/0-#14                      | 2/0-#3    | 50     | #2-#3   | 50       | E73571    | XCFR2      |
|       |                              | #4-#6     | 45     | #4-#6   | 35       |           |            |
|       |                              | #8        | 40     | #8      | 25       |           |            |
|       |                              | #10-#14   | 35     | #10-#14 | 20       |           |            |
| 67583 | 2/0-#14                      | 2/0-#6    | 120    | #2-#3   | 50       | E73571    | XCFR2      |
|       |                              | #8-#14    | 50     | #4-#6   | 35       |           |            |
|       |                              |           |        | #8      | 25       |           |            |
|       |                              |           |        | #10-#14 | 20       |           |            |
|       |                              |           | #2-#14 |         |          |           | LR15469    |

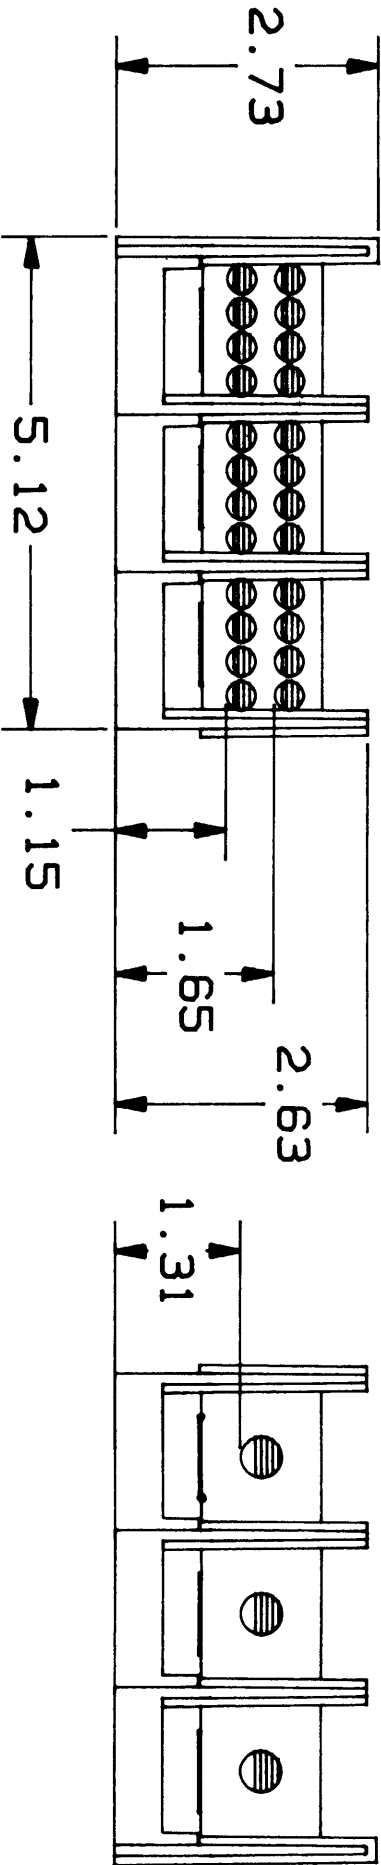

P/N 66583 (CU ONLY)  
P/N 67583 (CU-AL)

|                                                                                                                                                                                                                                 |  |                |  |                                                                                                                                                                                                                                                   |  |                 |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------|--|
| MATERIAL<br>SEE NOTE 1<br>FINISH<br>N/A                                                                                                                                                                                         |  |                |  | <div> <b>GOULD SHAWMUT</b><br/>         P.O. BOX 729<br/>         MARBLE FALLS, TX 78654       </div> <div>         PRODUCT INFO<br/>         TITLE<br/>         PDB. (1) 2/0-#14<br/>         X (8) #2-#14<br/>         3 POLE 600V       </div> |  |                 |  |
| NOTES UNLESS OTHERWISE SPECIFIED<br>- ALL DIMENSIONS ARE IN INCHES<br>- STAMP OR ETCH DNG. NO. ON PART<br>- REMOVE ALL BURRS AND SHARP EDGES<br>- TOLERANCES: XXXX+.0005: XXXX-.005:<br>XX+.01: X+.04: X/X+.1/32: ANGLES ±0°30' |  |                |  | THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.                                                                       |  |                 |  |
| ANY DNG USED ON                                                                                                                                                                                                                 |  | REF OR SIM DNG |  | DRAWN<br>RM<br>11/91                                                                                                                                                                                                                              |  | DATE<br>11/91   |  |
| CHECKED<br>GO<br>11/91                                                                                                                                                                                                          |  | ENGO           |  | APPRO<br>BM<br>11/91                                                                                                                                                                                                                              |  | SCALE<br>NONE   |  |
| DNG NO<br>0580363                                                                                                                                                                                                               |  | REV<br>00      |  | FILE NO                                                                                                                                                                                                                                           |  | SHEET<br>1 of 1 |  |

- 2
- P/N 66583 USES SLOTTED SET SCREW  
 P/N 67583 USES HEX SET SCREW.
1.
- MATL COMPOSITION AND RATING:  
 BASE-THERMOPLASTIC-125°C RTI  
 CONNECTOR-ALUMINUM OR COPPER  
 ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED