
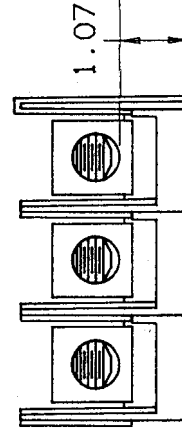
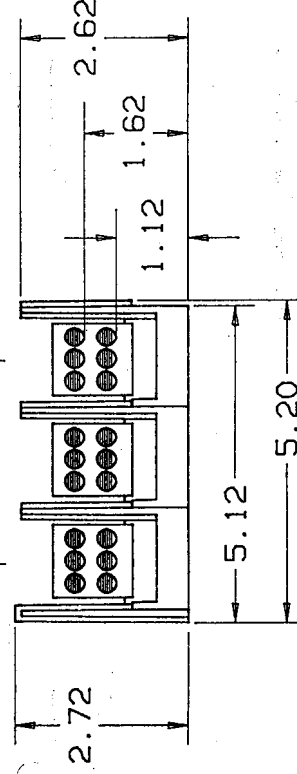


REV	DESCRIPTION	DATE	APPD
00	RELEASED		

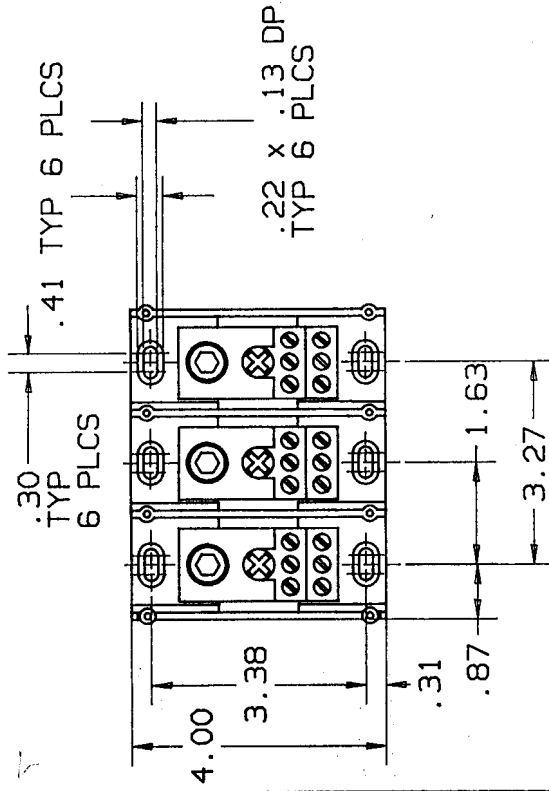

REFERENCE
MAR 16 1992

P/N 66663 (CU ONLY)

P/N 67663 (CU-AL)

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA REPORT NO.	
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.		
	RANGE	TORQUE	RANGE	TORQUE				
66663	350-#6	350-#6	275	#2-#14	E73571	XCFR2	LR69363	
				#2-#3				50
				#4-#6				35
				#8				25
67663	350-#6	350-#6	275	#2-#14	E73571	XCFR2	LR15469	
				#10-#14				20
				#2-#3				50
				#4-#6				35
	350-#6	350-#6	275	#8	E73571	XCFR2	LR15469	
				#10-#14				20

NOTES UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN INCHES
- STAMP OR ETCH Dwg. NO. ON PART
- REMOVE ALL BURRS AND SHARP EDGES
- TOLERANCES: XXXX±.0005; XXX±.005;
XX±.01; X±.04; X/X±1/32; ANGLES ±0°30'

THIS DRAWING AND ALL INFORMATION THEREON
IS THE PROPERTY OF GOULD. IS CONFIDENTIAL.
MUST NOT BE COPIED OR MADE PUBLIC UNLESS
AUTHORIZED AND IS SUBJECT TO RETURN ON
DEMAND.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125 °C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		PRODUCT INFO TITLE PDB, (1) 350 MCM- #6 X (6) #2-#14 3 POLE 600V		Dwg NO 05B0340		REV 00	
MATERIAL FINISH		SIGNATURES DATE		SCALE NONE		FILE NO 1 of 1	
APPROVAL USED ON		DRWN CHKD ENGR APPR		9/16/91 9/16/91		9/16/91	