

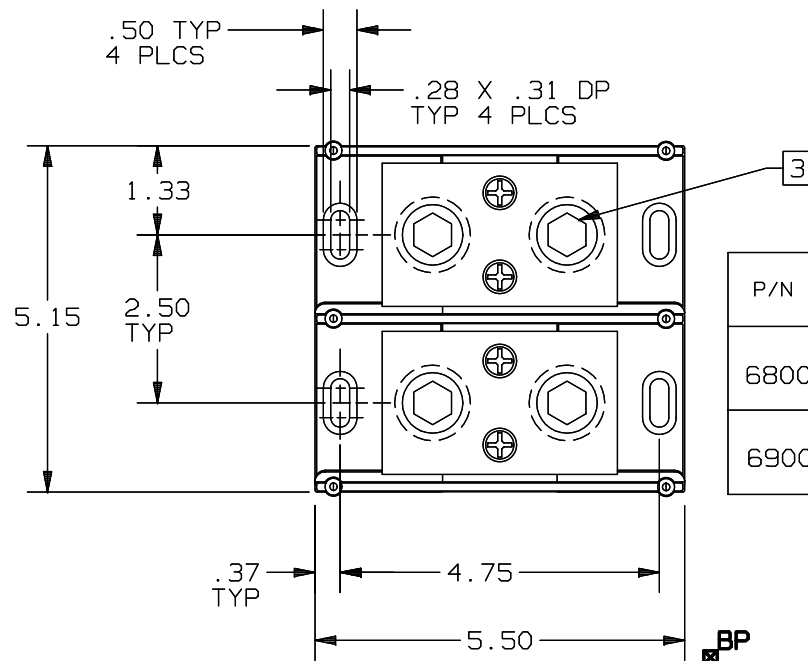


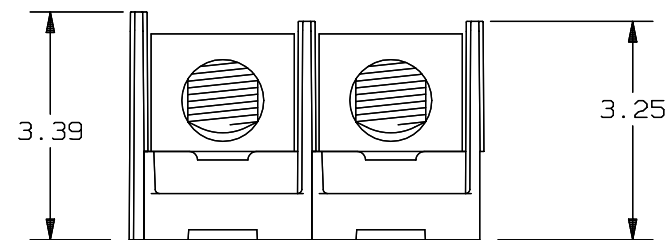

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY		SECONDARY		FILE #	GUIDE #	REPORT #
	RANGE	TORQUE	RANGE	TORQUE			
68002	250-1000	500	250-1000	500	E73571	XCFR2	LR69363
69002	250-1000	780	250-1000	780	E73571	XCFR2	LR69363

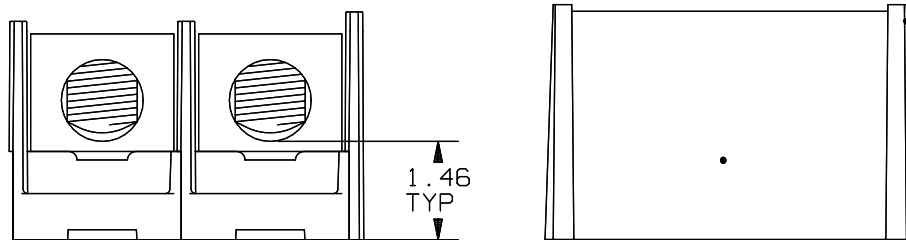

- [3] P/N 68002 USES A 15/16-16 SET SCREW
P/N 69002 USES A 1 1/8-12 SET SCREW
2. (1) 250 MCM - 1000 MCM X (1) 250 MCM - 1000 MCM,
2 POLE, 600 VOLTS

1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C RTI
CONNECTOR - ALUMINUM OR COPPER
ALLOY, TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED

P/N 68002 (CU ONLY)
69002 (CU/AL)

KDS 4/94

AE 4/94

PDB

05B0477

00