
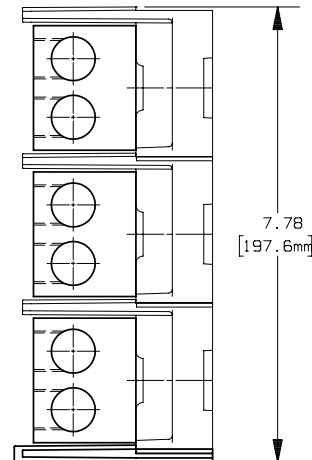


.50
[12.7mm]
.28
[7.1mm]

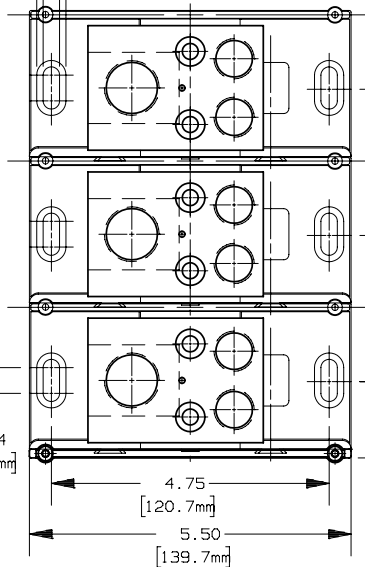

REV	DATE	ECO	DESCRIPTION	BY	CK	APP
-	7/14/05	N/A	INITIAL RELEASE	ELO	N/A	N/A

NOTES:

1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED
2. TOLERANCES ARE ±.01 UNLESS OTHERWISE SPECIFIED.

P/N	CONN. MAT'L.	WIRE RANGE & TORQUE (LBS-IN)				UL		CSA	
		PRIMARY		SECONDARY					
		RANGE	TORQUE	RANGE	TORQUE	FILE #	GUIDE #	FILE #	CLASS
68023	Cu	1000-250	500	350-#6	275	E73571	XCFR2	69363	6228
69023	Al	1000-250	780	350-#6	275	E73571	XCFR2	15469	3211

Ferraz Shawmut
FERRAZ SHAWMUT INC.
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

POWER DISTRIBUTION BLOCK

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

PRODUCT MANAGER

DESIGN ENGINEER

SIGN:

SIGN:

DATE:

DATE:

(1) 1000-250KCMIL X (2) 350-#6
3 POLE 600V

701194