



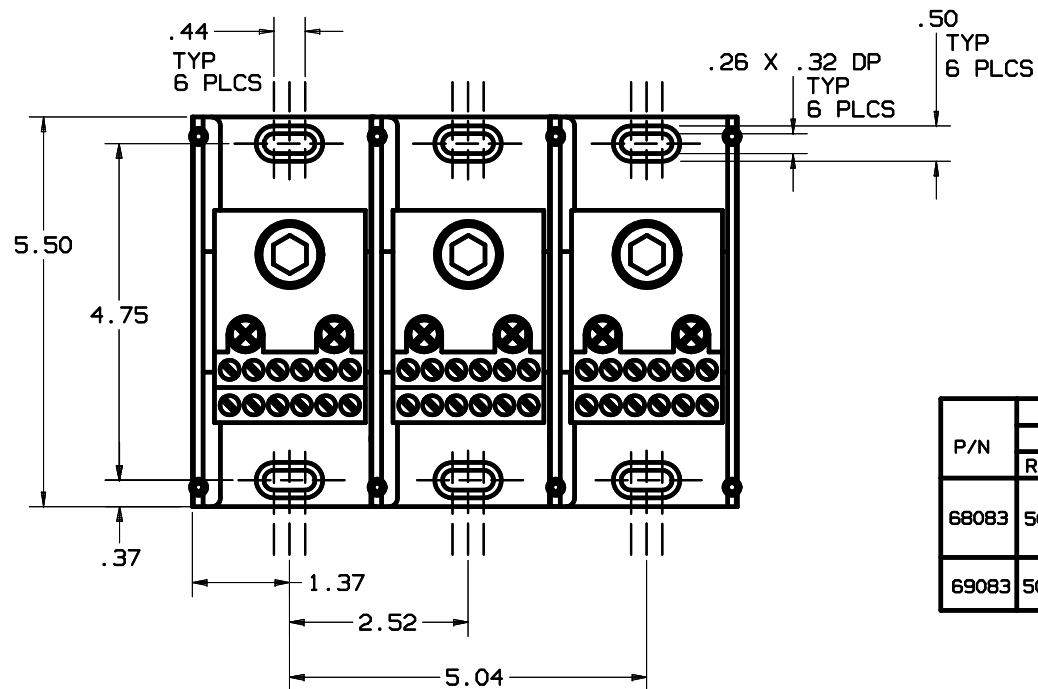


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L		CSA
	PRIMARY		SECONDARY		FILE NO.	GUIDE NO.	REPORT NO.
	RANGE	TORQUE	RANGE	TORQUE			
68083	500-#4	500-#4	375	#4-#14	E73571	XCFR2	LR69363
				#4-#6 45			
				#8 40			
69083	500-#4	500-#4	500	#4-#14	E73571	XCFR2	LR15469
				#4-#8 40			
				#10-#14 35			

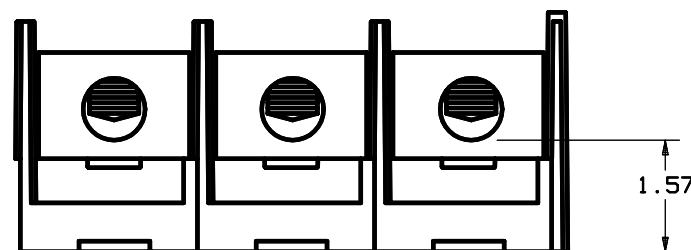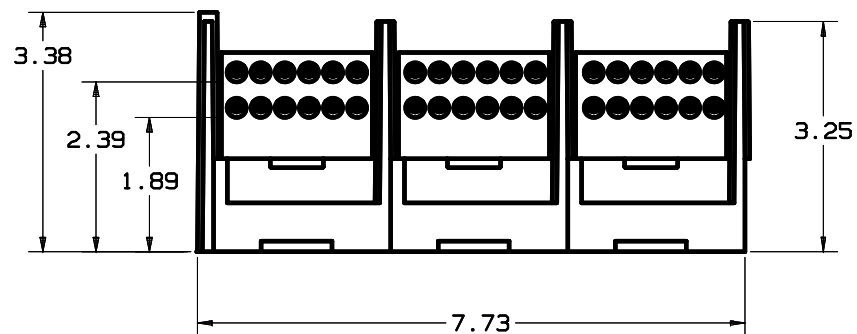

P/N 68083 {CU ONLY}
P/N 69083 {CU-AL}

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINIM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

PDB, (1) 500 MCM-
#4 X (12)#4-#14
3 POLE 600V

05C0287 00

3/4 1 1