

REV	DESCRIPTION	DATE	APPRO
0	RELEASED	3/2/92	RL


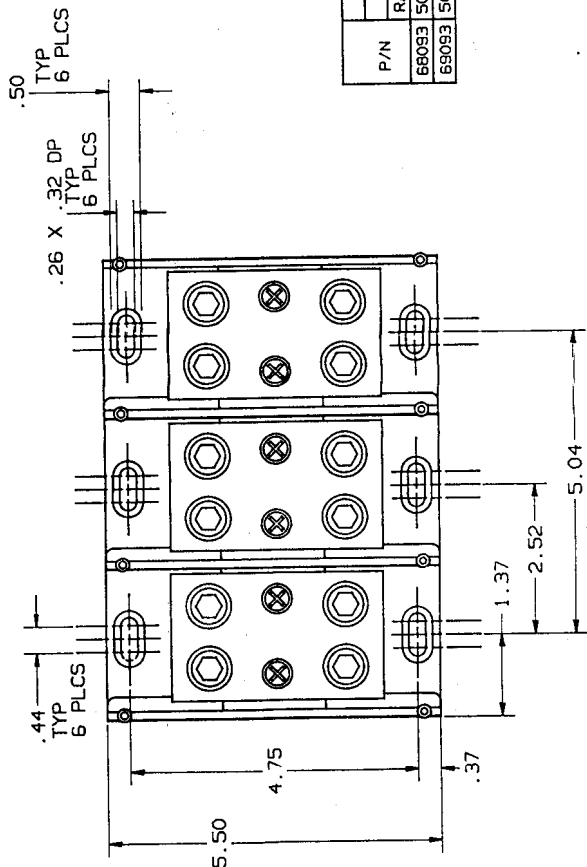


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L	FILE NO.	GUIDE NO.	REPORT NO.	CSA
	PRIMARY		SECONDARY						
	RANGE	TORQUE	RANGE	TORQUE					
68093	500-#4	500-#4	375	500-#4	375	E73571	XCFR2	LR69363	
69093	500-#4	500-#4	500	500-#4	500	E73571	XCFR2	LR15469	

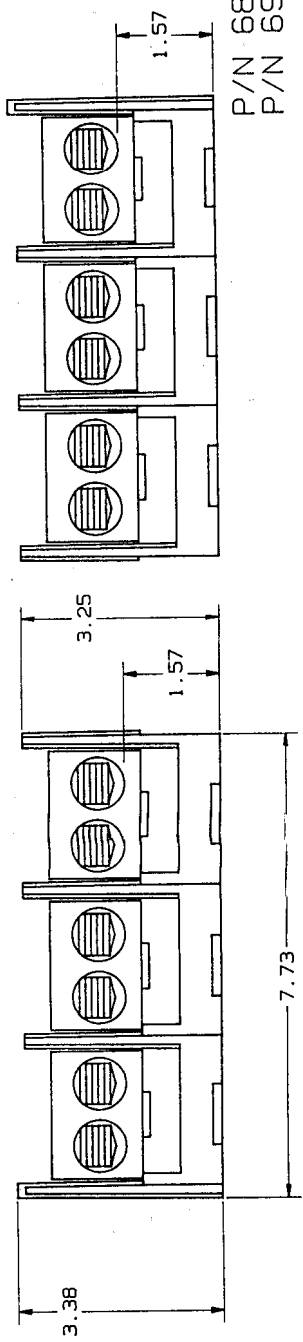

REFERENCE
MAR 1 6 1992

P/N 68093 (CU ONLY)
P/N 69093 (CU-AL)

GOULD SHAWMUT 1000 S. W. 10TH AVE. P.O. BOX 729 MARBLE FALLS, TX 78654		TITLE PDB, (2) 500 MCM- #4 X (2) 500MCM-#4 3 POLE 600V	
FINISH 3/11/92		DATE 3/11/92	
DESIGNED BY 05C0288		CHECKED BY 05C0288	
SCALE 3/4		SHEET 1 of 1	

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.
NOTES: UNLESS OTHERWISE SPECIFIED