

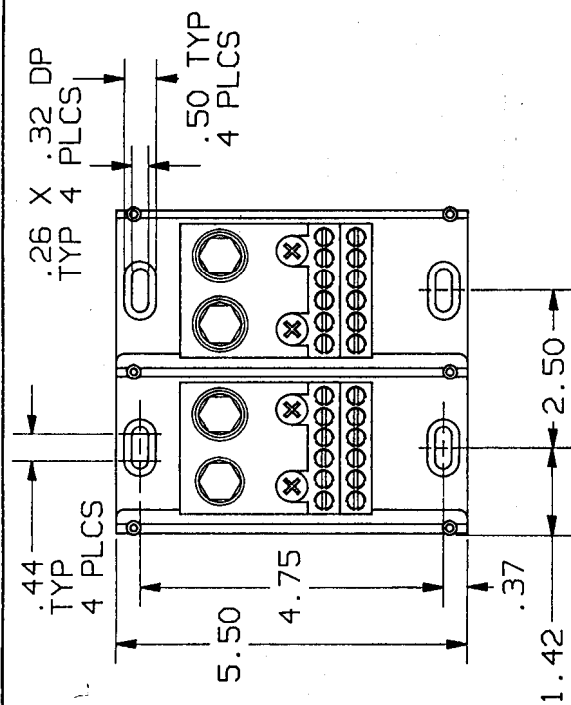


REV	DESCRIPTION	DATE	APPO
00	RELEASED	10/31/91	for

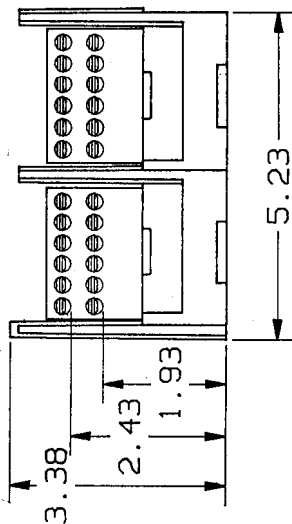

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL	CSA
	PRIMARY RANGE	SECONDARY RANGE	TORQUE	TORQUE		
68112	500-#4	500-#4	375	#4-#14 #8 45 #10-#14 35	E73571	LR69363
69112	500-#4	500-#4	500	#4-#14 #4-#8 40 #10-#14 35	E73571	LR15469

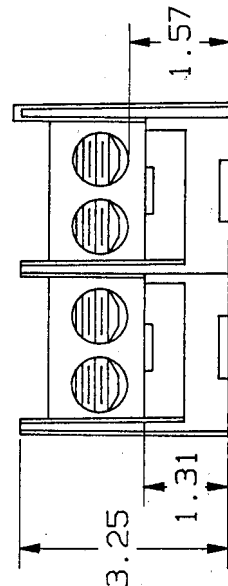

REFERENCE
MAR 16 1992

P/N 68112 (CU ONLY)
P/N 69112 (CU-AL)

GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		PRODUCT INFO TITLE PDB (2) 500MCM-#4 X (12) #4-14 2 POLE 600V		Dwg NO 05B0360 REV 00	
MATERIAL SEE NOTE 1		FINISH N/A		SCALE NONE	
NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH Dwg. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXX±.0005; XXX±.005; XX±.01; X±.04; X/X±1/32; ANGLES ±0°30'		THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		1. MATL COMPOSITION AND RATING: BASE-THERMOPLASTIC-125 °C RTI CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.	
ASSY Dwg USED ON		REF OR STM Dwg		SHEET 1 of 1	
SIGNATURES DRWN RW CKD GO ENGR APPD BM		DATE 11/91 11/91		FILE NO 11/91	

NOTES: UNLESS OTHERWISE SPECIFIED