REV	DATE	ECO	DESCRIPTION	BY	CK
00	1/93		RELEASED		

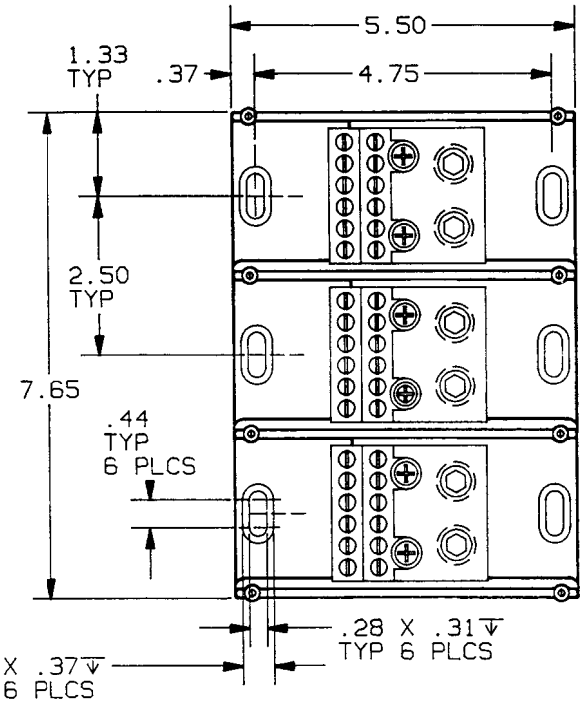

P/N	WIRE RANGE & TORQUE (IN-LBS)					UL		CSA
	PRIMARY			SECONDARY				
	RANGE	TORQUE		RANGE	TORQUE	FILE #	GUIDE #	REPORT #
68143	350-#6	350-#6	275	#4 -#14	#4 -#6 45	E73571	XCFR2	LR69363
					#8 40			
					#10-#14 35			
69143	350-#6	350-#6	275	#4 -#14	#4 -#8 40	E73571	XCFR2	LR15469
					#10-#14 35			

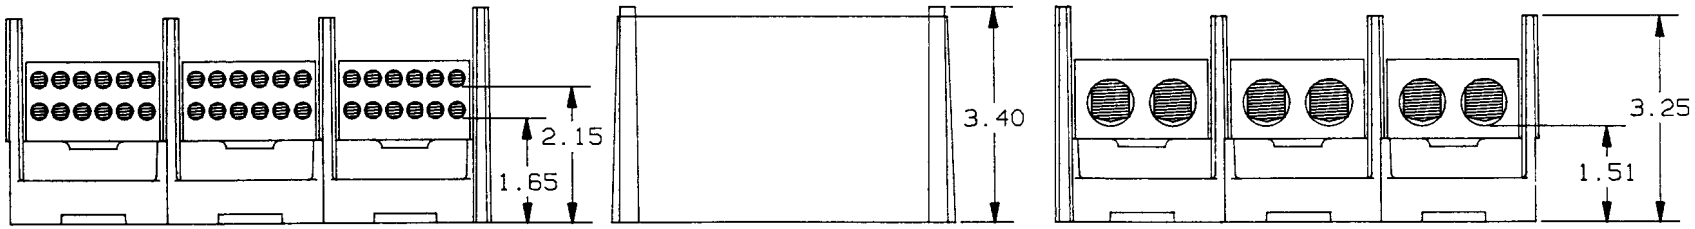

2. (2) 350 MCM-#6 X (12) #4-#14
   3 POLE, 600V.

1. MATERIAL COMPOSITION AND RATING:
   BASE - THERMOPLASTIC 125°C
   CONNECTOR - ALUMINUM OR COPPER ALLOY
   W/TIN PLATE.

NOTES: UNLESS OTHERWISE NOTED

P/N 68143 (CU ONLY)
69143 (CU/AL)

GOULD
CIRCUIT PROTECTION DIV.
GOULD INC.
P.O. BOX 729
MARBLE FALLS, TX 78654

DRAWN BY:	DATE:	UNIT. REL.
KDS	1/93	
CHECKED BY:	DATE:	SCALE:
GHO	1/93	NONE

DESCRIPTION: PDB

IDENTIFICATION NO. & REVISION: 05B0424 00

TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXXX±.0005; .XXX±.005; .XX±.01; .X±.02; X/X±1/32
UNSPECIFIED ANGLES±1°; SPECIFIED ANGLES±0°30'
DIMENSIONS APPLY AFTER PLATING
ALL SURFACES TO BE 125 UNLESS OTHERWISE SPECIFIED
BREAK ALL SHARP EDGES

THIS DRAWING AND ALL INFORMATION THERE ON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.

REFDOC: -