

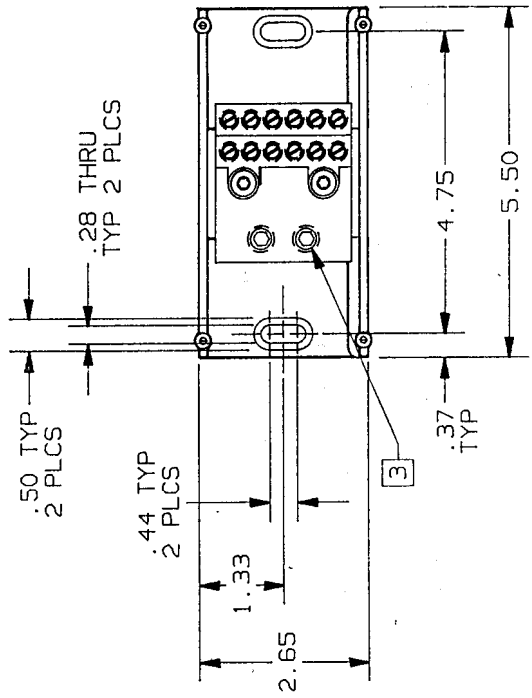


REV	DATE	ECO	DESCRIPTION	BY	CK
00	7/10/95		RELEASED	26	

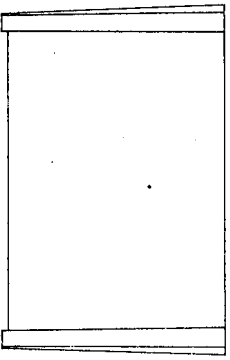

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY RANGE	PRIMARY TORQUE	SECONDARY RANGE	SECONDARY TORQUE	FILE #	GUIDE #	
68161	2/0-#14	2/0-#3 50	#4-#14	#4-#6 45	E73571	XCFR2	LR15469
		#4-#6 45		#8 40			
		#8 40		#10-#14 35			
		#10-#14 35					
69161	2/0-#14	2/0-#6 120	#4-#14	#4-#8 40	E73571	XCFR2	LR15469
		#8-#14 50		#10-#14 35			

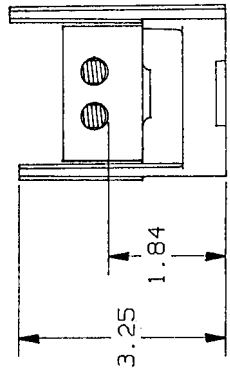

CONTROLLED COPY
ISSUED TO **Newburyport**
DATE **JUL 17 1995**

- [3] P/N 68161 USES A STD SLOT DRIVER
- P/N 69161 USES A 3/16 HEX DRIVER
- 2. (2)2/0-#14 X (12)#4-#14 600V.1 POLE
- 1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C RTI
CONNECTOR - ALUMINUM OR COPPER
ALLOY, TIN PLATED

P/N 68161 {CU ONLY}
69161 {CU-AL}

GOULD
CIRCUIT PROTECTION DIV.
HARTFORD, CT 06183

DATE: 7/95
CHECKED BY: KDS
SCALE: NONE
REFDOC:

IDENTIFICATION NO. 05B0519
00

NOTES: UNLESS OTHERWISE SPECIFIED