REV	DATE	ECO	DESCRIPTION	BY	CK
00	7/93		RELEASED	GO	AE

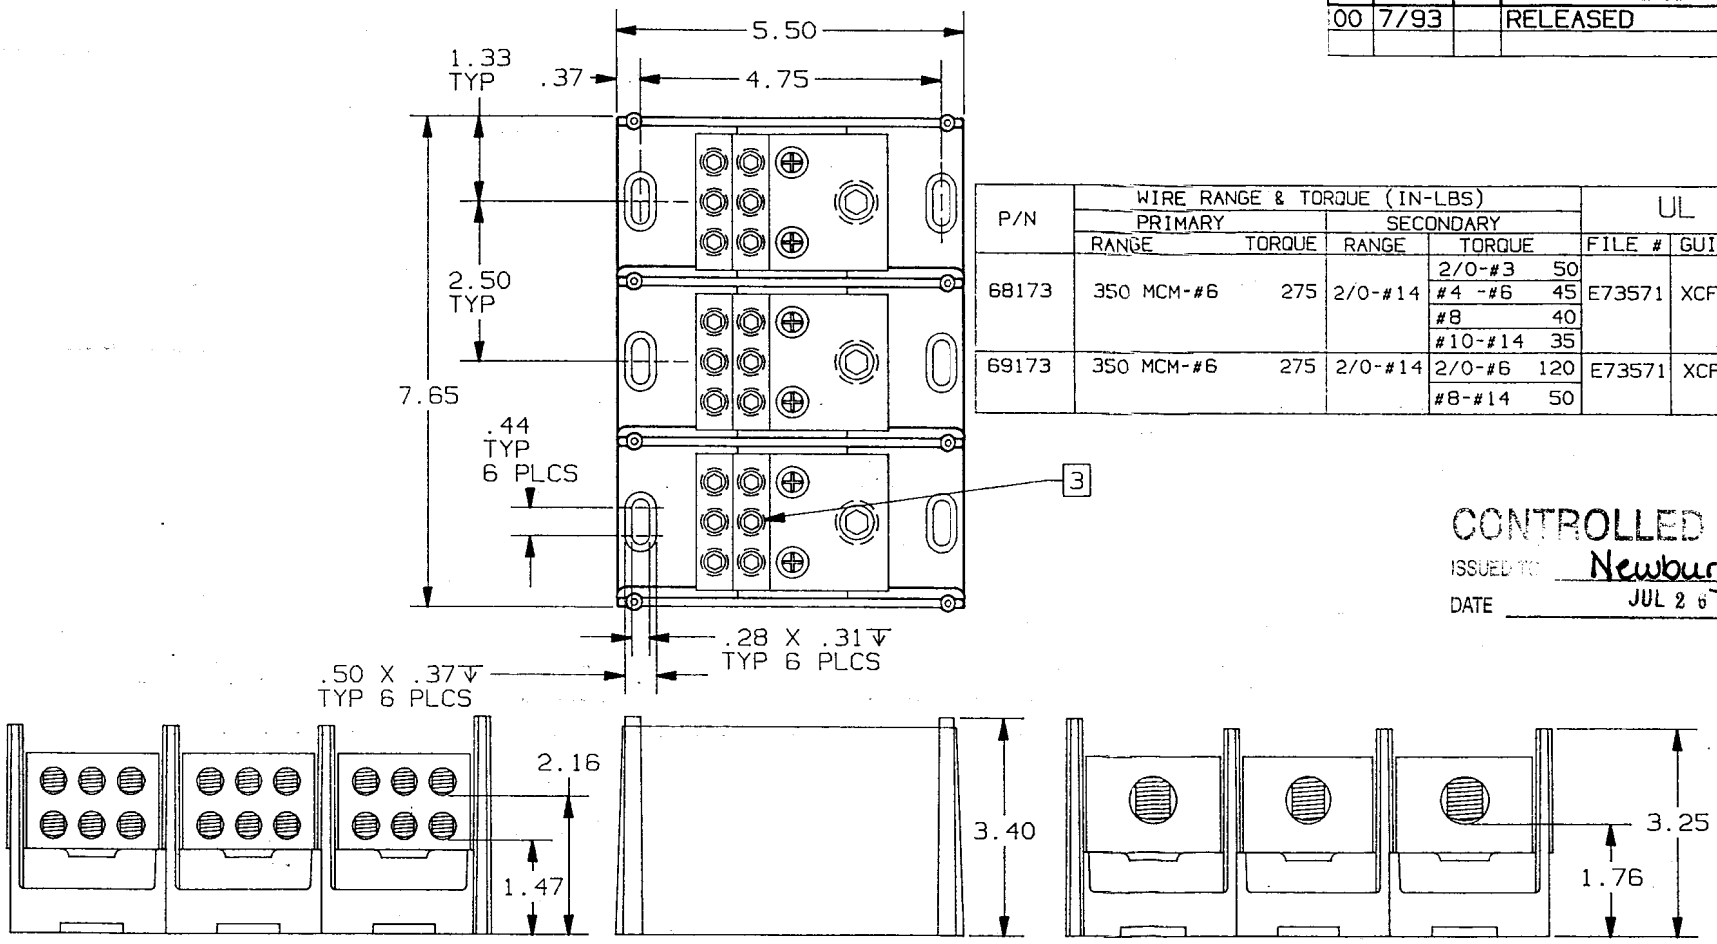

P/N	WIRE RANGE & TORQUE (IN-LBS) PRIMARY RANGE	PRIMARY TORQUE	SECONDARY RANGE	SECONDARY TORQUE		UL FILE #	UL GUIDE #	CSA REPORT #
68173	350 MCM-#6	275	2/0-#14	2/0-#3	50	E73571	XCFR2	LR69363
				#4 -#6	45			
				#8	40			
				#10-#14	35			
69173	350 MCM-#6	275	2/0-#14	2/0-#6	120	E73571	XCFR2	LR15469
				#8-#14	50			

CONTROLLED COPY
ISSUED TO: Newburyport
DATE JUL 2 6 1993

3 P/N 68173 USES Ø 3/8 SLOTTED HD SET SCREW
P/N 69173 USES Ø 7/16 HEX SOCKET SET SCREW.

2. (1) 350 MCM - #6 X (6) 2/0 - #14 3 POLE, 600V.

1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C
CONNECTOR - ALUMINUM OR COPPER ALLOY W/TIN PLATE.

NOTES: UNLESS OTHERWISE NOTED

P/N 68173 (CU ONLY)
69173 (CU/AL)

GOULD CIRCUIT PROTECTION DIV.
GOULD INC. P.O. BOX 728 MARBLE FALLS, TX 78654

DRAWN BY:	DATE:	UNIT. REL.
KDS	7/93	
CHECKED BY:	DATE:	SCALE:
AE	7/93	NONE

DESCRIPTION: PDB

IDENTIFICATION NO. & REVISION: 05B0441 00

TOLERANCE TO BE APPLIED UNLESS OTHERWISE SPECIFIED: .XXXX±.0005; .XXX±.005; .XX±.01; .X±.02; X/X±1/32
UNSPECIFIED ANGLES±1°, SPECIFIED ANGLES±0°30'
DIMENSIONS APPLY AFTER PLATING
ALL SURFACES TO BE 125√ UNLESS OTHERWISE SPECIFIED
BREAK ALL SHARP EDGES
THIS DRAWING AND ALL INFORMATION THERE ON IS THE PROPERTY OF GOULD INC. AND IS SUBJECT TO RETURN ON DEMAND. THIS INFORMATION IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED.
REFDOC:-