



REV	DATE	ECO	DESCRIPTION	BY	CK
00	4/93		RELEASED	871	SC

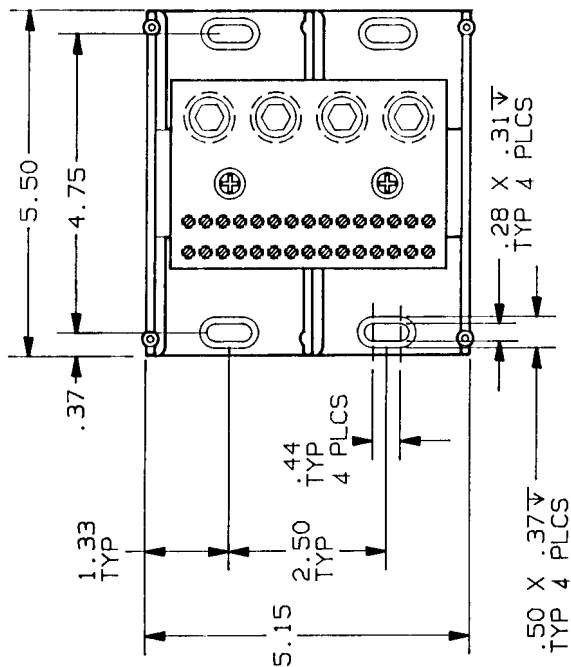

P/N	WIRE RANGE & TORQUE (IN-LBS)			UIL		CSA
	PRIMARY RANGE	TORQUE	SECONDARY RANGE	FILE #	GUIDE #REPORT #	
68191	#4-500 MCM	500	#6	35		LR69363
			#8	25	E73571 XCFR2	
			#10-#14	20		
69191	#4-500 MCM	500	#6	28		LR15469
			#8	25	E73571 XCFR2	
			#10-#14	20		

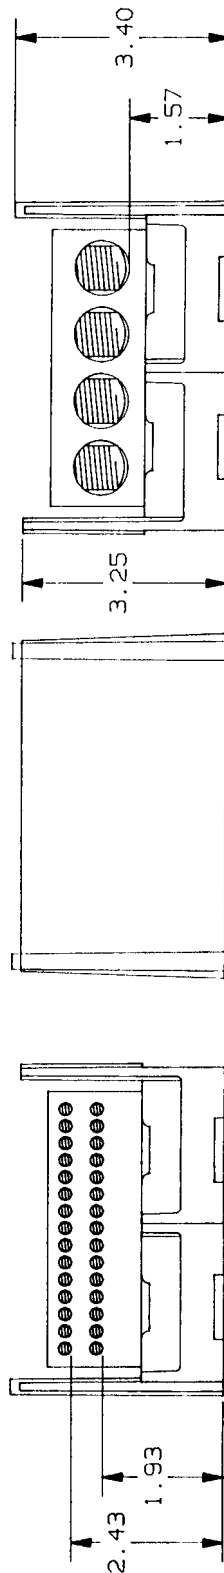

P/N 68191 (CU ONLY)
69191 (CU/AL)

2. (4) 500 MCM X (30) #6 3 POLE, 600V.

1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C
CONNECTOR - ALUMINUM OR COPPER ALLOY
W/TIN PLATE.

NOTES: UNLESS OTHERWISE NOTED

GOULD CIRCULIT PROTECTION DIV. DATE: 4/93 DRAWN BY: KDS CHECKED BY: GH0 SCALE: NONE REF: DOC.		P/N 68191 69191 05B0430 00	
---	--	----------------------------------	--