


REV	DATE	ECO	DESCRIPTION	BY	CK	APP
-	1/18/06	N/A	INITIAL RELEASE	ELQ	N/A	N/A

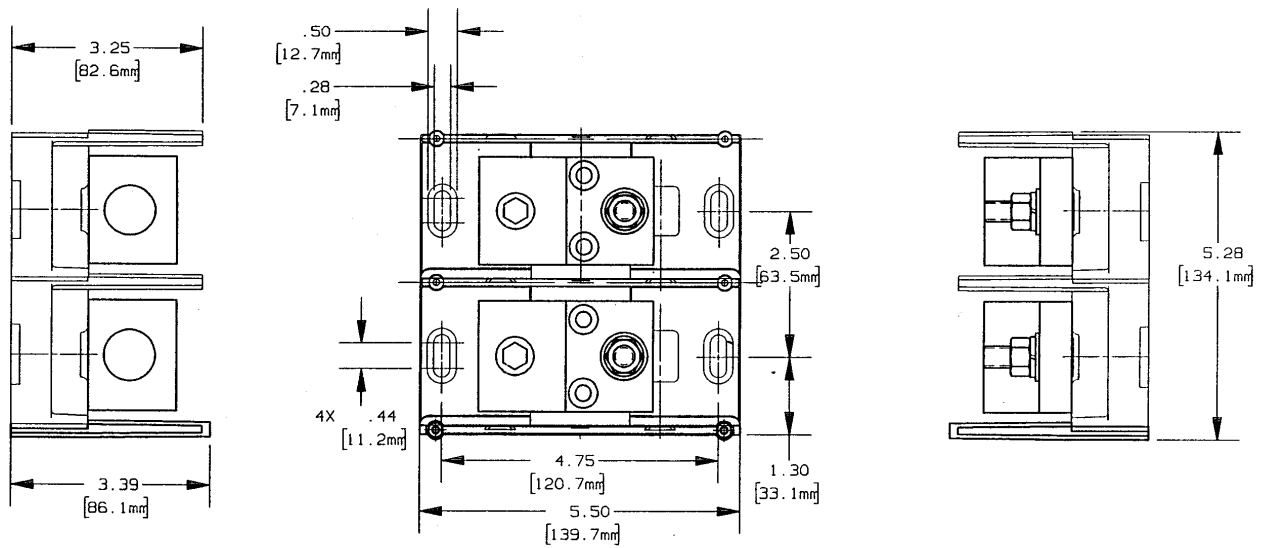

NOTES:

1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED
2. TOLERANCES ARE $\pm .01$ UNLESS OTHERWISE SPECIFIED.

P/N	CONN. MAT'L.	WIRE RANGE & TORQUE (LBS-IN)				UL		CSA	
		PRIMARY		SECONDARY		FILE #	GUIDE #	FILE #	CLASS
		RANGE	TORQUE	RANGE	TORQUE				
68212	Cu	500-#4	375	3/8-16 X1 STUD	228	E73571	XCFR2	69363	6228
69212	Al	500-#4	500	3/8-16 X1 STUD	228	E73571	XCFR2	15469	3211

Ferraz Shawmut

 FERRAZ SHAWMUT INC.
 374 MERRIMAC STREET
 NEWBURYPORT, MA 01950

POWER DISTRIBUTION BLOCK

 OUTLINE DIMENSIONS
 NOT TO BE USED FOR PRODUCTION

PRODUCT MANAGER

DESIGN ENGINEER

 SIGN: *Muller*
 DATE: 1-19-06

 SIGN: *Jones*
 DATE: 1/19/06

 (1) 500MCM-#4 X (1) 3/8-16 X 1 STUD
 2 POLE 600V

701250