

REV	DESCRIPTION	DATE	APPRO
0	RELEASED	8/28/76	767


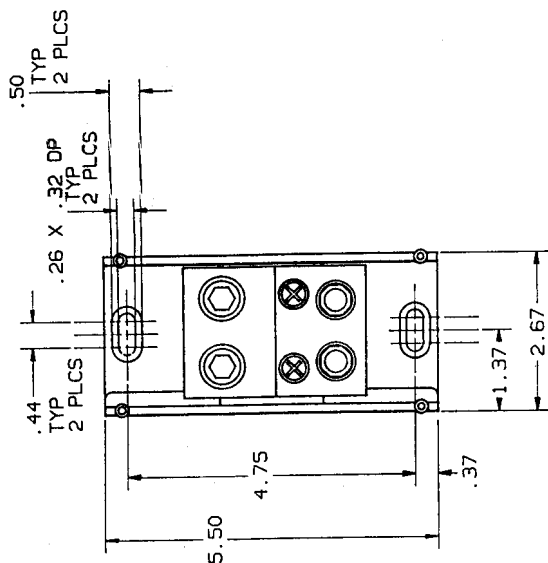


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L	CSA
	PRIMARY	RANGE	TORQUE	FILE NO.	GUIDE NO.	REPORT NO.
68221	500-#4	375	3/8-1	228	E73571	XCFR2 LR69363
69221	500-#4	500	3/8-1	228	E73571	XCFR2 LR15469

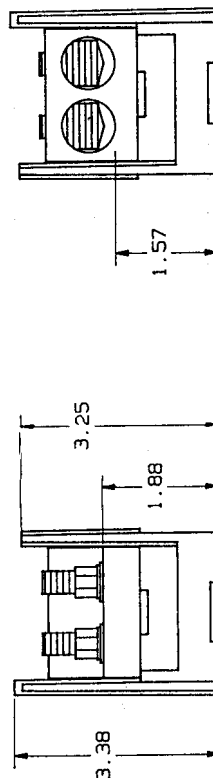

REFERENCE

MAR 16 1992

P/N 68221 (CU ONLY)
P/N 69221 (CU-AL)

GOULD SHAWMUT GOLD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 76664		TITLE PDB, (2)500CH-#4 X (2) 3/8-1 STUD 1 POLE 600V	
NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - FINISH OF ALL SURFACES SHALL BE AS SPECIFIED - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX.0005 XXXX.0005 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED		SIGNATURES DATE 8/28/76	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL AND NOT TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE AUTHORIZATION OF GOULD. IT IS SUBJECT TO RETURN ON DEMAND.		SCALE 3/4	
USED BY 11/1/76		FILE NO 00	
END 11/1/76		REVISION 11/1/76	

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED