

REV	DESCRIPTION	DATE	APPRO
0	RELEASED	10/10/92	[Signature]


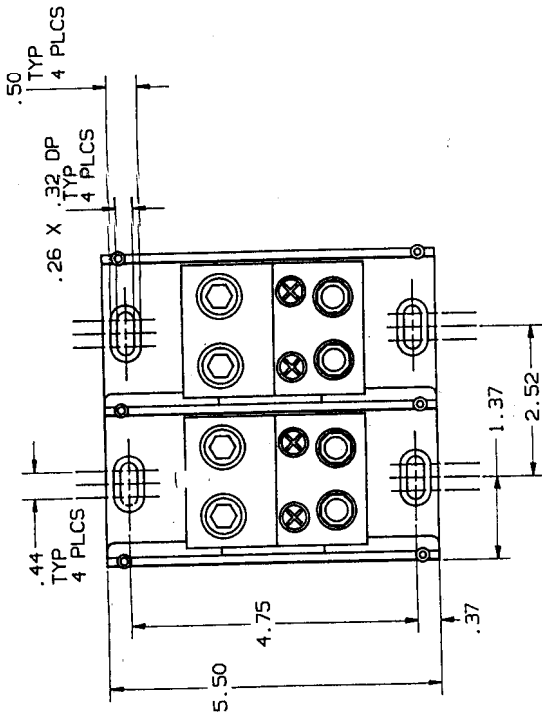


TABLE 1

P/N	WIRE RANGE & TORQUE (IN-LBS)						U/L	CSA
	PRIMARY		SECONDARY					
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.		
	REPORT NO.							
68222	500-#4	500-#4 375	3/8-1	3/8-1 228	E73571	XCFR2	LR69363	
69222	500-#4	500-#4 500	3/8-1	3/8-1 228	E73571	XCFR2	LR15469	

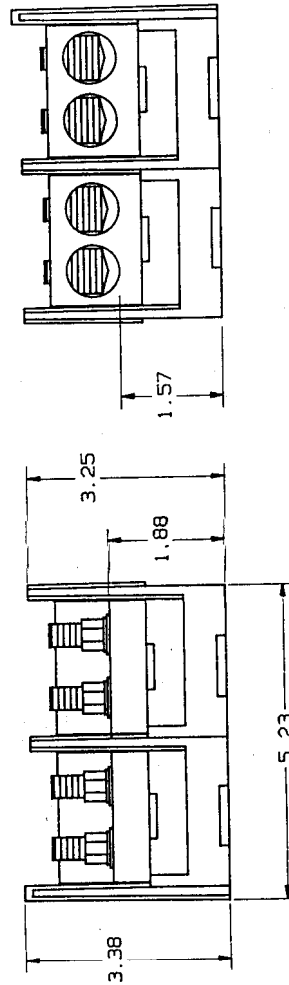

REFERENCE

MAR 16 1992

P/N 68222 (CU ONLY)
P/N 69222 (CU:AL)

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: FRACTIONS DECIMALS ANGLES FINISH: UNLESS OTHERWISE SPECIFIED		GOLD SHAWMUT GOLD SHAWMUT MOBILE FALLS, TX 76654 PRODUCT NAME	
MATERIAL FINISH DATE SIGNATURE CHECKED BY DATE APPROVED BY DATE		TITLE POB. (2) 500MCM-#4 X (2) 3/8-1 STUO 2 POLE 600V OSC0289 SCALE 3/4 SHEET 1 of 1	

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED