



REV	DATE	ECO	DESCRIPTION	BY	CK
00	4/93		RELEASED	787	Co

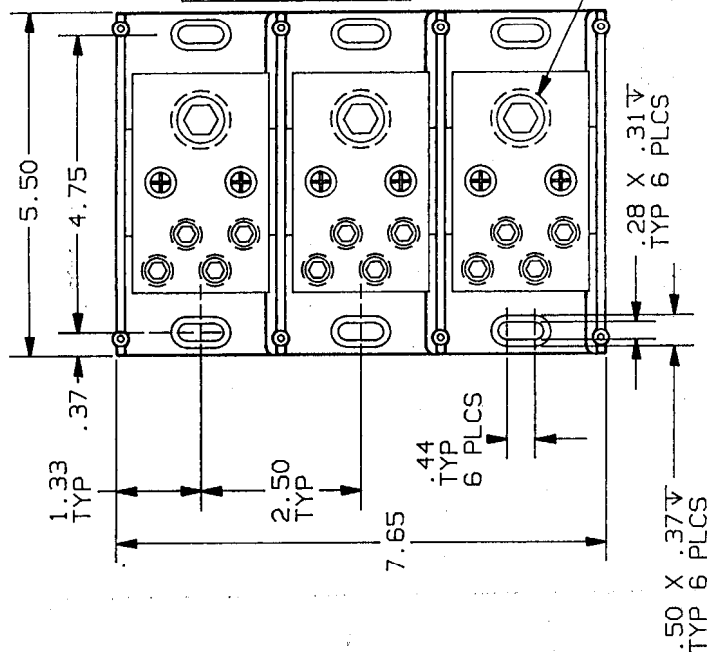

P/N	WIRE RANGE & TORQUE (IN-LBS)			UL	CSA
	PRIMARY RANGE	TORQUE	SECONDARY TORQUE	FILE #	GUIDE #REPORT #
68303	1000-250 MCM	500	4/0-#10	4/0-#10 150	E73571 XCFR2 LR69363
69303	1000-250 MCM	500	4/0-#6	4/0-#3 150 #4 100 #6 80	E73571 XCFR2 LR15469

CONTROLLED COPY

APR 21 1993

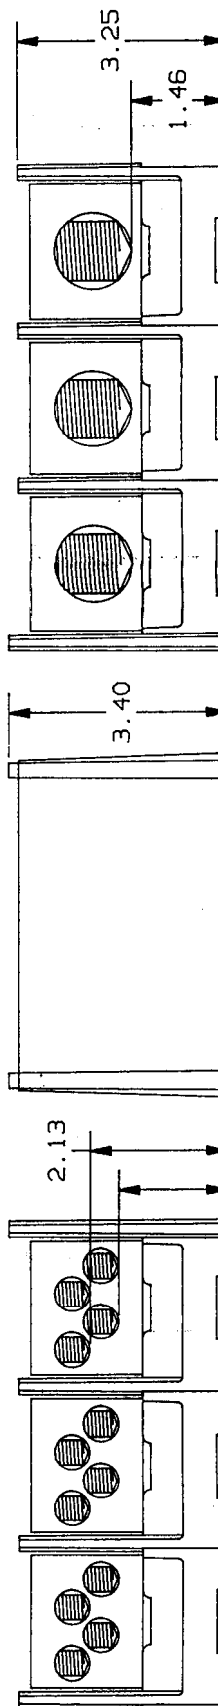

- P/N 68303 USES Ø15/16 HEX SOCKET SET SCREW
- P/N 69303 USES Ø1 1/8 HEX SOCKET SET SCREW.
- (1) 1000 MCM-250 MCM X (4) 4/0 3 POLE, 600V.

1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C
CONNECTOR - ALUMINUM OR COPPER ALLOY
W/TIN PLATE.

NOTES: UNLESS OTHERWISE NOTED

GOULD INC. 1000 WEST 10TH AVENUE, SUITE 100 DENVER, CO 80202-1000, USA		TOLERANCES TO BE APPLIED UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN PARENTHESES ARE FOR INFORMATION ONLY. ALL DIMENSIONS TO BE TO UNLESS OTHERWISE SPECIFIED.	
DRAWN BY: KDS CHECKED BY: GH0	DATE: 4/93 DATE: 4/93	UNIT: INCH SCALE: NONE	REVISION: 1 REVISION: 1
DESCRIPTION: PDB		IDENTIFICATION NO.: 05B0429 00	