



00 9/93 RELEASED

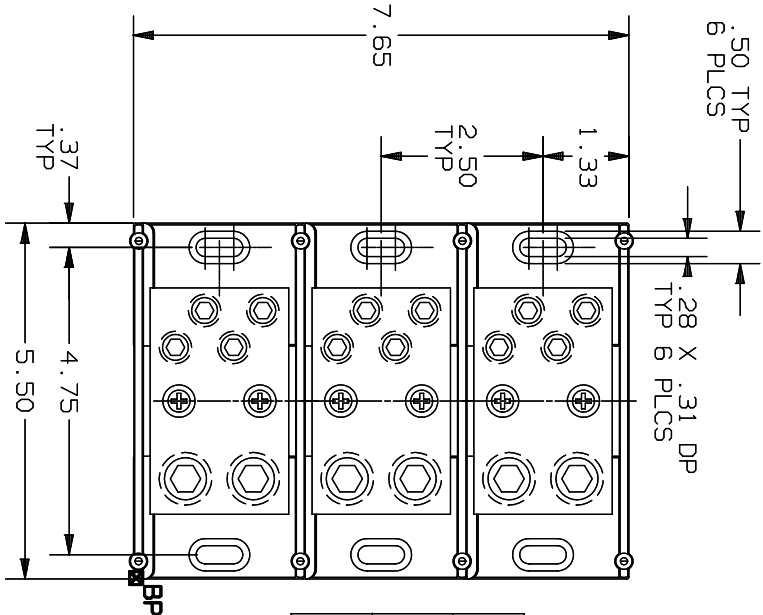

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY	TORQUE	SECONDARY		FILE #	GUIDE #	
68313	500 - #4	375	4/0 - #6	#4 100 #6 80	E73571	XCFR2	LR69363
69313	500 - #4	500	4/0 - #6	#4 100 #6 80	E73571	XCFR2	LR15469

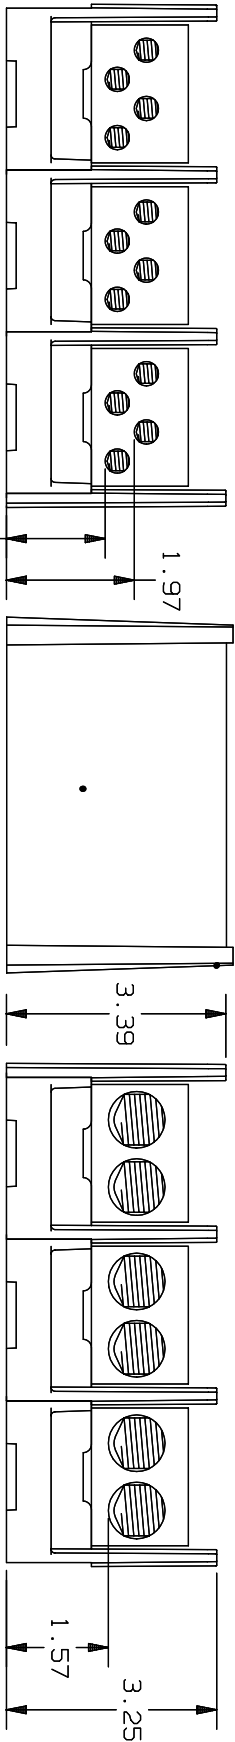

2. (2) 500MCM - #4 X (4) 4/0 - #6, 3 POLE, 600 VOLTS

1. MATERIAL COMPOSITION AND RATING:

BASE - THERMOPLASTIC 125°C RTI
CONNECTOR - ALUMINUM OR COPPER
ALLOY, TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED

KDS 9/93

AE 9/93

PDB

05B0449

00