



REV	DATE	EDD	DESCRIPTION	BY	CK
00	10/93		RELEASED	GO	48

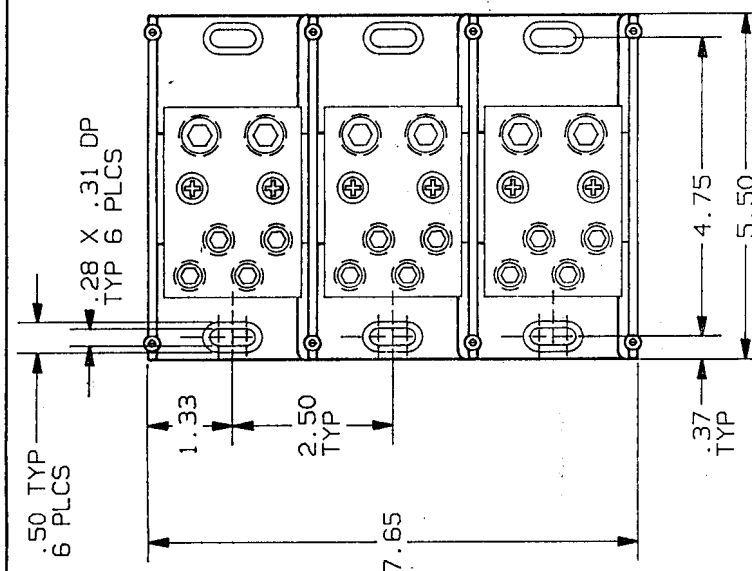

P/N	WIRE RANGE & TORQUE (IN-LBS)			
	RANGE	PRIMARY TORQUE	RANGE	SECONDARY TORQUE
68323	350-#6	275	4/0-#10 4/0-#10 150	
69323	350-#6	275	4/0-#10 4/0-#10 150	

CONTROLLED COPY
ISSUED TO *Newburyport*
DATE *DEC 20 1993*

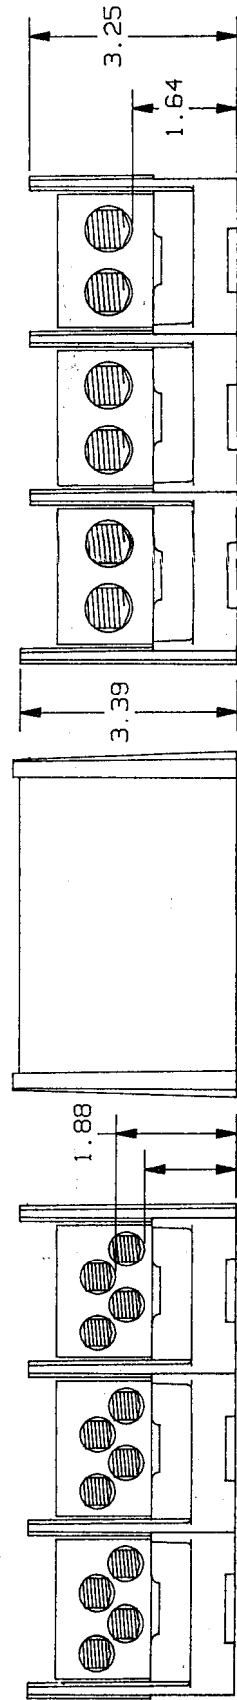

P/N 68323 {CU}
69323 {CU-AL}

GOULD P.O. BOX 728
CIRCUIT PROTECTION DIV. MOBILE, AL 36688

DATE: 10/93
KDS
AE

DATE: 10/93
SCALE: NONE
REF: 000

IDENTIFICATION NO. & REVISION
05B0457 00

- (2) 350MCM - #6 X (4) 4/0 - #10, 3 POLE, 600 VOLTS
- MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C RTI
CONNECTOR - ALUMINUM OR COPPER
ALLOY, TIN PLATED

NOTES: UNLESS OTHERWISE SPECIFIED