


REV	DESCRIPTION	DAI
00	RELEASED	

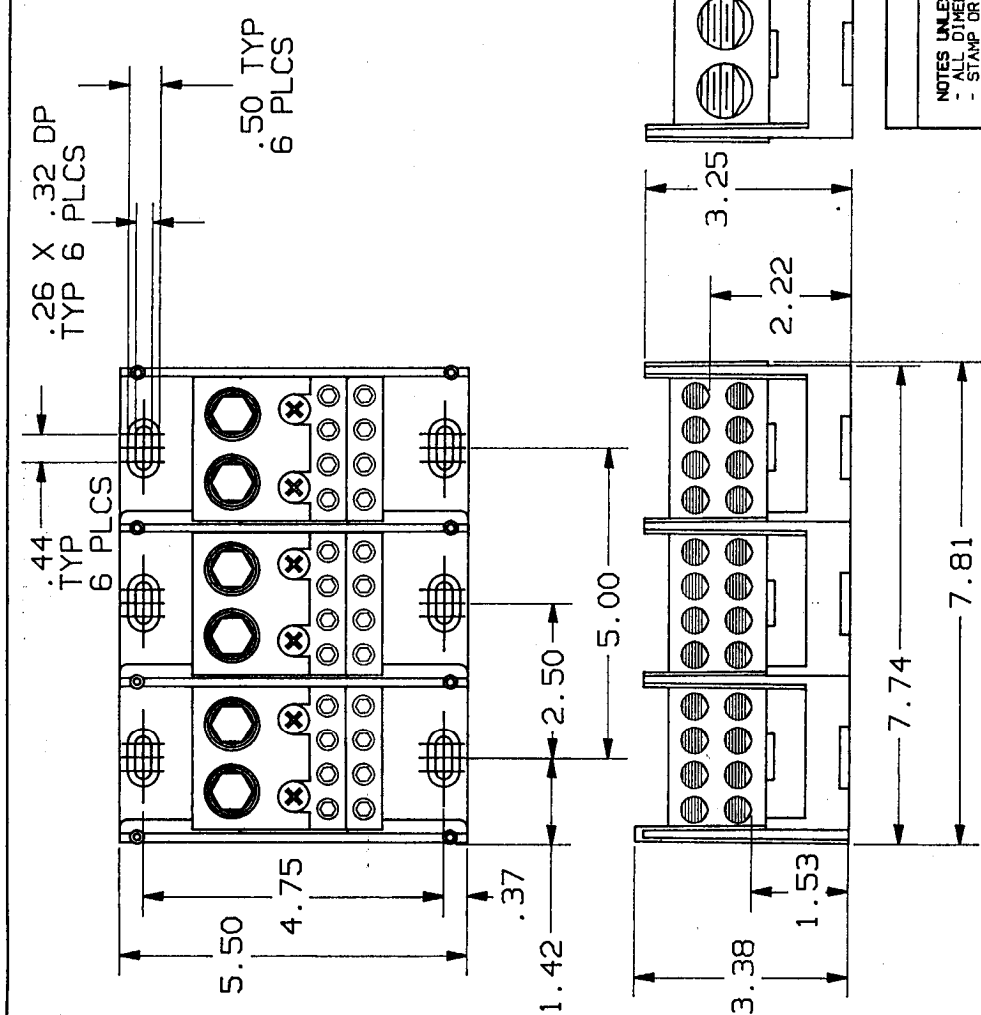

P/N	WIRE RANGE & TORQUE (IN-LBS)			
	PRIMARY		SECONDARY	
	RANGE	TORQUE	RANGE	TORQUE
68353	500-#4	500-#4	2/0-#3	50
			#4-#6	45
			#8	40
			#10-#14	35
69353	500-#4	500-#4	2/0-#6	120
			#8-#14	50

REFERENCE

MAR 16 1992

P/N 68353 (CU ONLY)
P/N 69353 (CU-AL)

GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		PRODUCT INFO TITLE PDB: (2) 500MCM-#4 X (8) 2/0-#14 3 POLE 600V		DWG NO 05B0358	REV 00
MATERIAL FINISH NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DWG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX+.0005; XXXX-.005; XX+.01; X+.04; X/X+.1/32; ANGLES .40*.30'		SIGNATURES DATE DRWN CHKD ENGR APPD	SCALE NONE	FILE NO NONE	SHEET 1 of 1

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125 °C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED