


REV	DESCRIPTION	DATE	APPO
00	RELEASED	11/91	

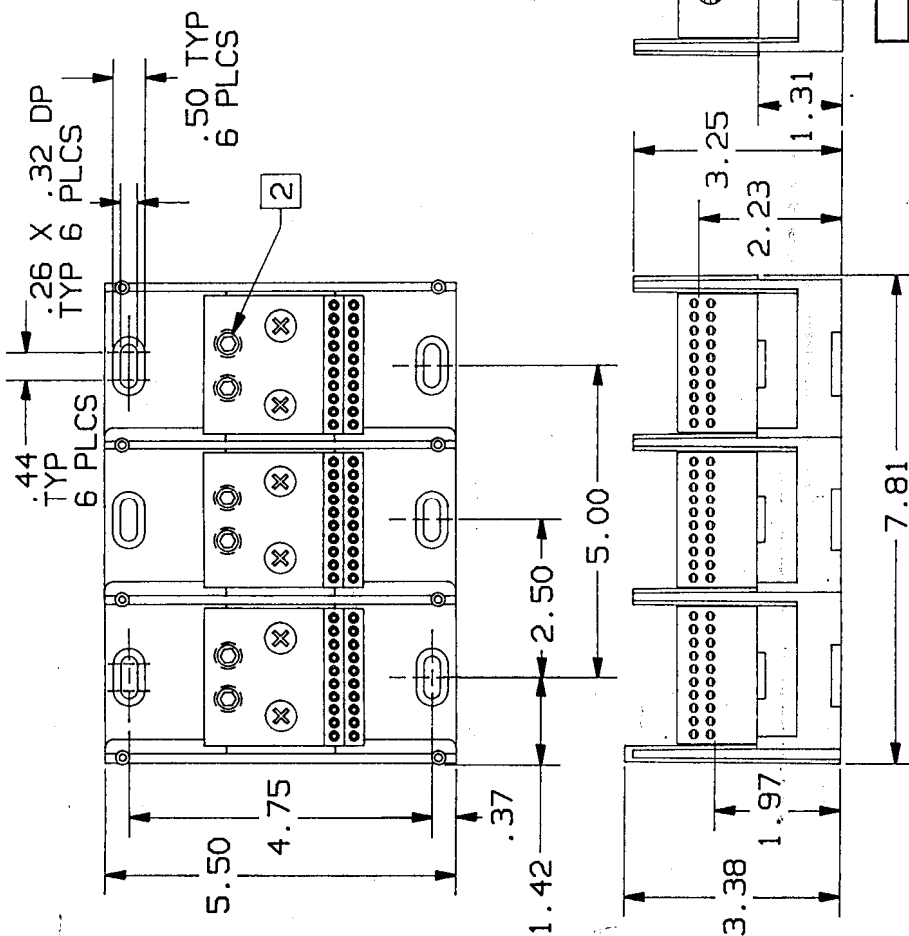

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL	
	PRIMARY RANGE	TORQUE	SECONDARY RANGE	TORQUE	FILE #	GUIDE # REPORT #
68603	2/0-#14	#8	#10-#14	#10-#14	15	E73571 XCFR2 LR69363
	2/0-#14	#6	#10-#14	#10-#14	15	E73571 XCFR2 LR69363
	2/0-#14	#4	#10-#14	#10-#14	15	E73571 XCFR2 LR69363
	2/0-#14	#3	#10-#14	#10-#14	15	E73571 XCFR2 LR69363
69603	2/0-#14	#8	#10-#14	#10-#14	15	E73571 XCFR2 LR15469
	2/0-#14	#6	#10-#14	#10-#14	15	E73571 XCFR2 LR15469

REFERENCE

MAR 16 1992

P/N 68603 (CU ONLY)
P/N 69603 (CU-AL)

GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
PRODUCT INFO PDB, (2) 2/0-#14 X (20) #10-#14 3 POLE 600V		TITLE PDB, (2) 2/0-#14 X (20) #10-#14 3 POLE 600V	
MATERIAL SEE NOTE 1		FINISH N/A	
NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STANDARD TOLERANCES UNLESS NOTED OTHERWISE - REMOVAL OF BURRS AND SHARP EDGES - TOLERANCES: XXXX+.0005; XXXX-.0005; XX+.003; XX-.001; X+.04; X/X+.1/32; ANGLES ±0° 30'		THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.	
ASSY ENG USED ON	REF OR STD ENG	DRHN RW GO ENGO APPD BM	DATE 11/91 11/91 11/91 11/91
SCALE NONE		FILE NO 05B0361	
SHEET 1 OF 1		REV 00	

- [2] P/N 68603 USES SLOTTED SET SCREW.
P/N 69603 USES HEX SET SCREW.

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125 °C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED