


REV	DESCRIPTION	DATE	APPD
00	RELEASED	11/91	707

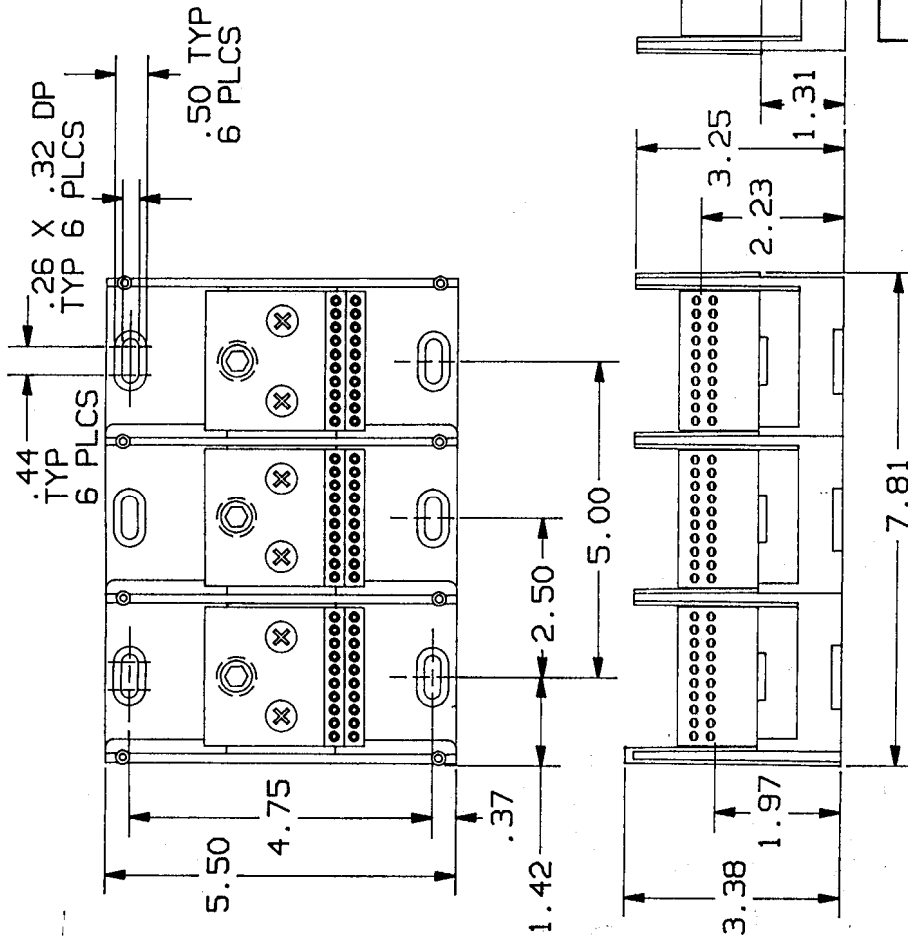

P/N	WIRE RANGE & TORQUE (IN-LBS)				UL		CSA
	PRIMARY RANGE	TORQUE	SECONDARY RANGE	TORQUE	FILE #	GUIDE #	
68633	350-#6	275	#10-#14	#10-#14	15	E73571	LR69363
69633	350-#6	275	#10-#14	#10-#14	15	E73571	LR15469

REFERENCE

MAR 16 1992

P/N 68633 (CU ONLY)
P/N 69633 (CU-AL)

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DRG NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; X/X±1/32; ANGLES ±0°30'		MATERIAL		SEE NOTE 1	
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.		FINISH		N/A	
ASSY DRG USED ON	REF OR STA DRG	SIGNATURES	DATE	TITLE	
		DRWN	11/91	PDB, (1) 350 MCM-#6	
		CHKO	11/91	X (20) #10-#14	
		ENGO		3 POLE 600V	
		APPO	11/91	SCALE	NONE
				FILE NO	05B0362
				REV	00
				SHEET	1 of 1

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125 °C RTI
CONNECTOR-ALUMINUM OR COPPER
ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

GOULD SHAWMUT
GOULD SHAWMUT
P.O. BOX 729
MARBLE FALLS, TX 78654

PRODUCT INFO

TITLE

PDB, (1) 350 MCM-#6

X (20) #10-#14

3 POLE 600V

SCALE

NONE

FILE NO

05B0362

REV

00

SHEET

1 of 1