



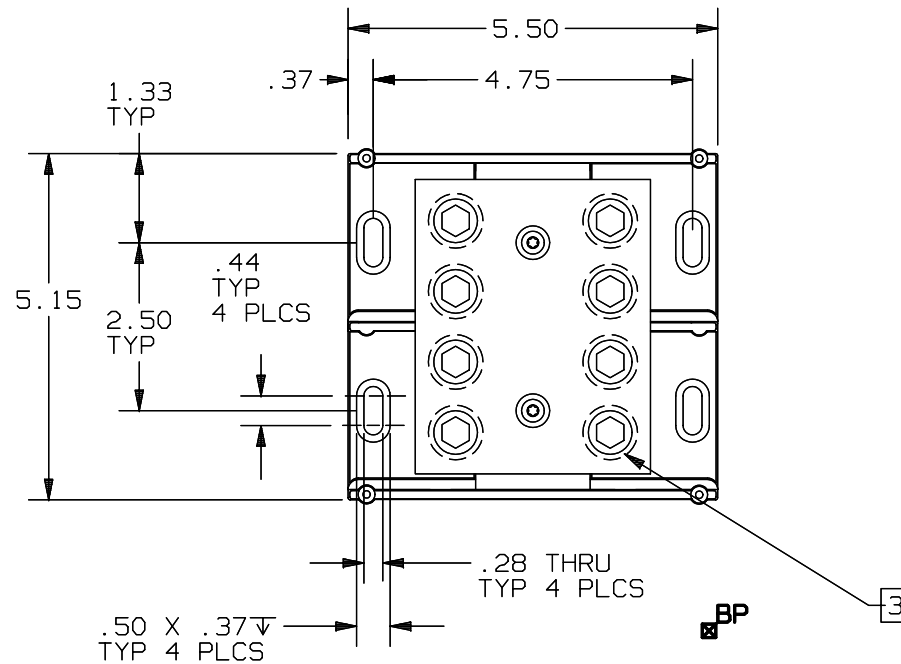

P/N	WIRE RANGE & TORQUE (IN-LBS)			
	PRIMARY		SECONDARY	
	RANGE	TORQUE	RANGE	TORQUE
900071	500 MCM-#4	500	500 MCM-#4	500
800031	500 MCM-#4	375	500 MCM-#4	375

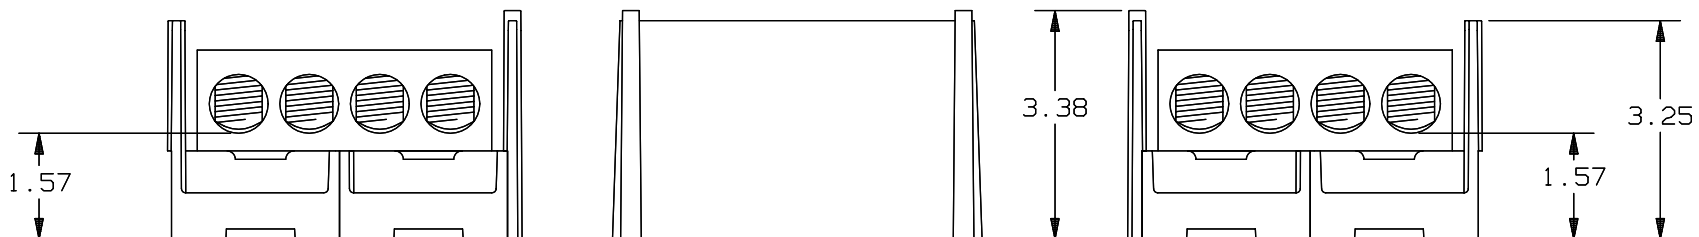

- [3] P/N 900071 USES 7/16 HEX DRIVER
P/N 800031 USES 3/8 HEX DRIVER
2. (4) 500 MCM -#4 X (4) 500 MCM 1 POLE, 600V
1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C RTI
CONNECTOR - ALUMINUM OR COPPER ALLOY W/TIN PLATE.

P/N 900071 (CU/AL)
800031 (CU ONLY)

KDS 7/95

NOTES: UNLESS OTHERWISE NOTED

PDB

05B0525

00