



00 6/12/95 RELEASED

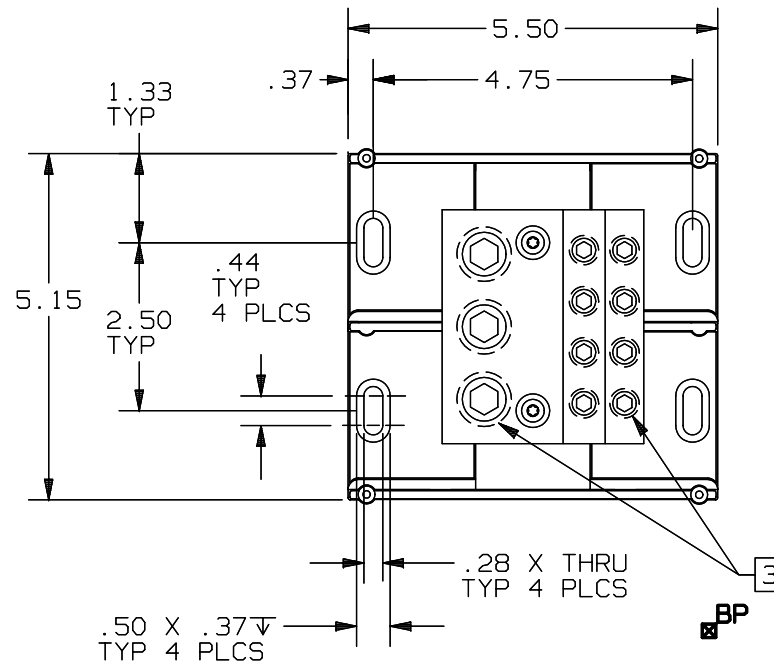

P/N	WIRE RANGE & TORQUE (IN-LBS)			
	PRIMARY		SECONDARY	
	RANGE	TORQUE	RANGE	TORQUE
900061	500 MCM-#4	500	2/0-#14	2/0-#6 120
				#8-#14 50

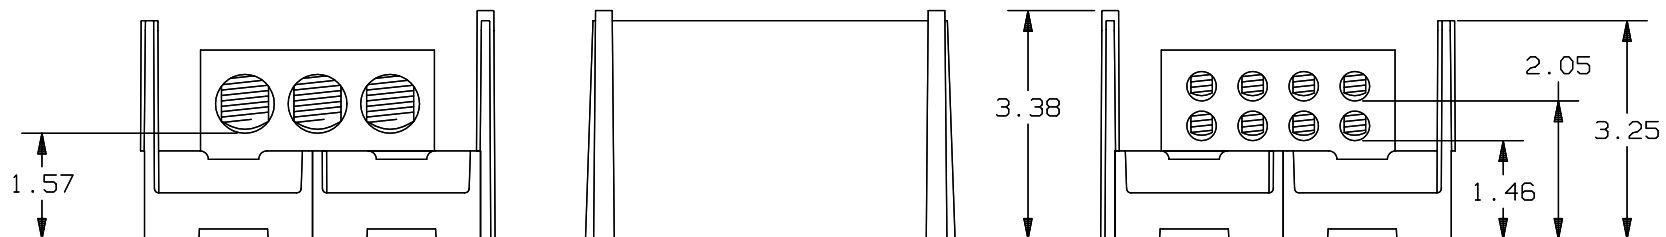

P/N 900061 (CU/AL)

- [3] P/N 900061 USES 3/16 AND 7/16 HEX DRIVERS
2. (3) 500 MCM -#4 X (8) 2/0-#14 1 POLE, 600V
1. MATERIAL COMPOSITION AND RATING:
 BASE - THERMOPLASTIC 125°C
 CONNECTOR - ALUMINUM W/TIN PLATE.

KDS 6/95

NOTES: UNLESS OTHERWISE NOTED

PDB

05B0515

00