


REV	DATE	ECO	DESCRIPTION	BY	CHK	APP
-	6/12/02	N/A	INITIAL RELEASE	LAS	N/A	N/A

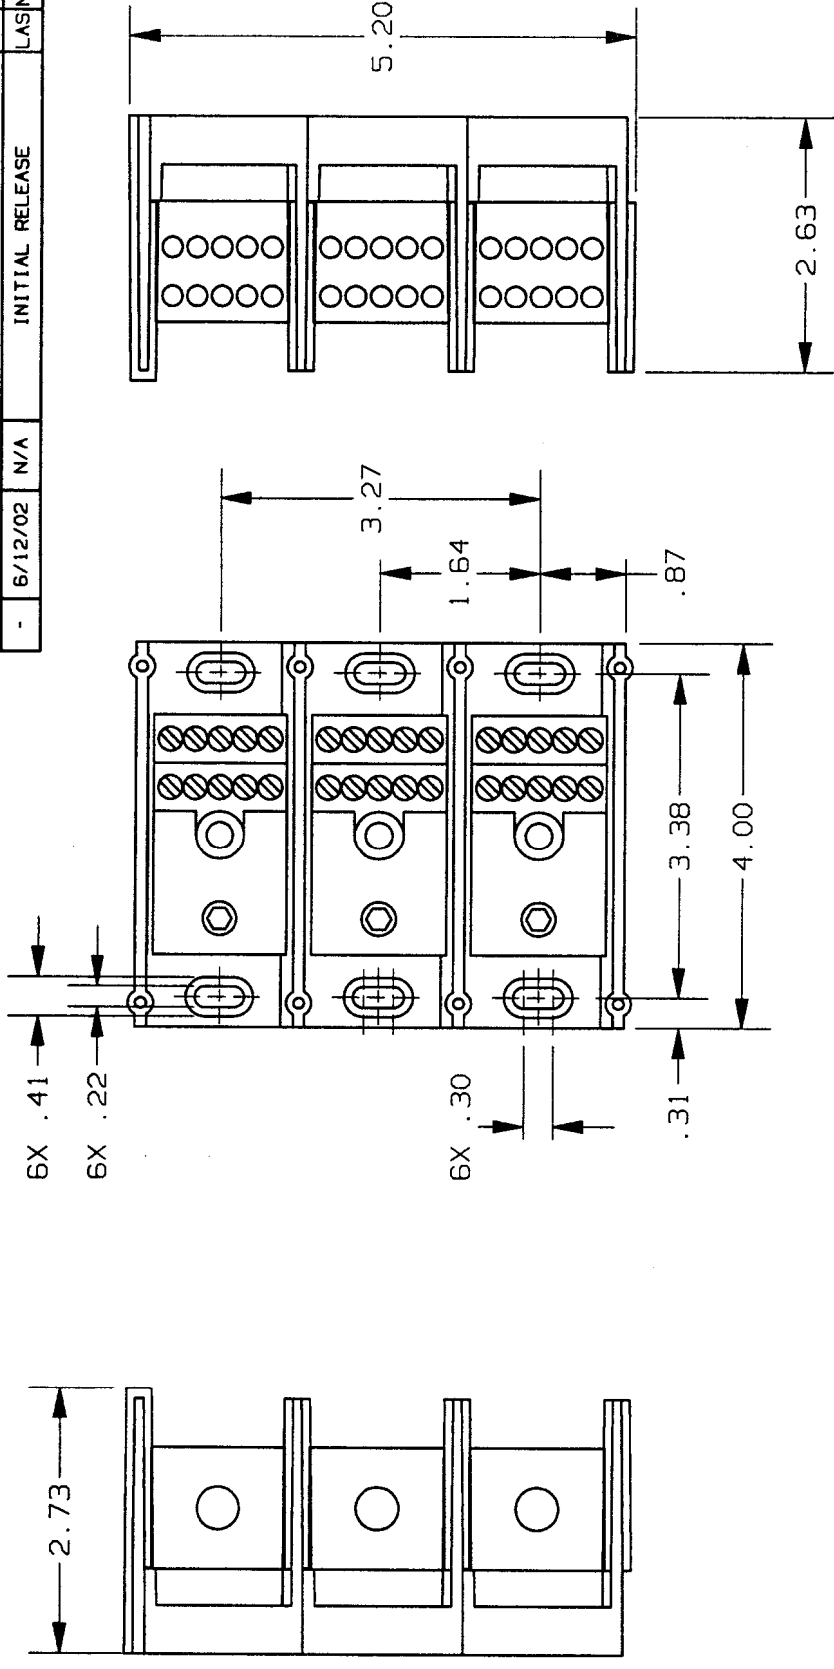

NOTES:

1. MATERIAL COMPOSITION AND RATING:
BASE: THERMOPLASTIC 125°C RTI
CONNECTOR: ALUMINUM OR COPPER ALLOY-TIN PLATED
2. TOLERANCES ARE ±.01 UNLESS OTHERWISE SPECIFIED.

P/N 66593 (CU ONLY)
67593 (CU-AL)

P/N	CONN. MAT'L.	WIRE RANGE & TORQUE (LBS-IN)				UL		CSA	
		PRIMARY		SECONDARY		FILE #	GUIDE #	FILE #	CLASS
66593	Cu	2/0-#14	2/0-#3	50	#6	E73571	XCFR2	69363	6228
			#4-#6	45	#8				
			#8	40	#10-#14				
			#10-#14	35	#10-#14				
67593	Al	2/0-#14	2/0-#6	120	#6	E73571	XCFR2	15469	3211
			#8-#14	50	#8				
			#10-#14	40	#10-#14				
			#10-#14	35	#10-#14				

Ferraz Shawmut
FERRAZ SHAWMUT INC.
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

PRODUCT MANAGER: *[Signature]* DESIGN ENGINEER: *[Signature]*

SIGN: *[Signature]* DATE: 6-12-02
SIGN: *[Signature]* DATE: 6/12/02

POWER DISTRIBUTION BLOCK

(1) 2/0-#14 X (10) #6-#14
3 POLE 600V

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

700845