
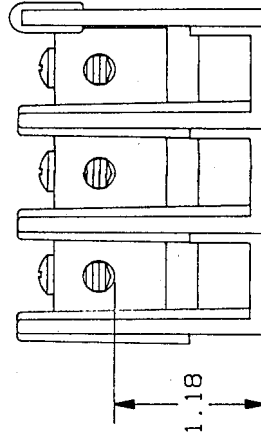
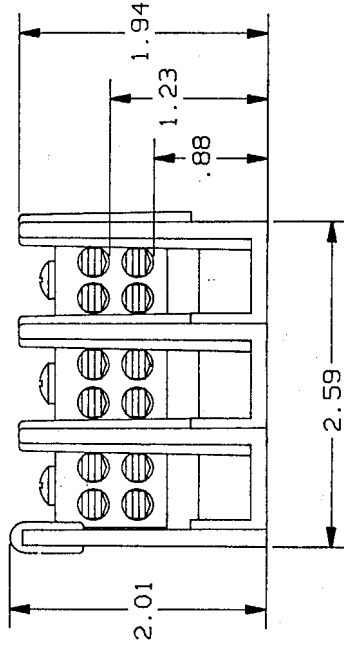


REV	DATE	EDD	DESCRIPTION	BY	CHK
00	5/92		RELEASED	7/21/90	

TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)						UL		CSA
	PRIMARY			SECONDARY			FILE NO.	GUIDE NO.	
	RANGE	TORQUE		RANGE	TORQUE				
62163	# 4-# 14	# 4-# 6	35	# 4-# 14	# 4-# 6	35	E73571	XCFR2	LR69363
		# 8	25		# 8	25			
		# 10-# 14	20		# 10-# 14	20			
63163	# 4-# 14	# 4-# 6	35	# 4-# 14	# 4-# 6	35	E73571	XCFR2	LR69363
		# 8	25		# 8	25			
		# 10-# 14	20		# 10-# 14	20			

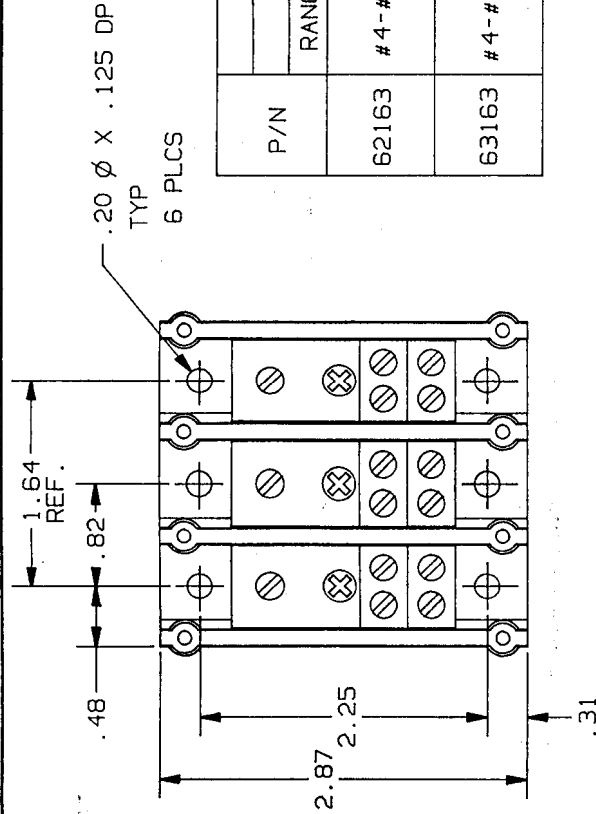

REFERENCE
MAY 21 1992

P/N 62163 (CU ONLY)
P/N 63163 (CU-AL)

2. (1)#4-#14 X (4)#4-#14 3 POLE 600V

1. MATL COMPOSITION AND RATING:
BASE-THERMOPLASTIC-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED

BOULD INC. 1000 N. 10TH AVE. DENVER, CO 80202 TEL: 303.733.1111 FAX: 303.733.1112		TOLERANCES TO BE APPLIED UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN PARENTHESES ARE FOR INFORMATION ONLY. DIMENSIONS IN PARENTHESES ARE FOR INFORMATION ONLY. DIMENSIONS IN PARENTHESES ARE FOR INFORMATION ONLY.	
CDR: KDS DATE: 4/92 CHECKED BY: GO SCALE: 1:1	PART NO.: 62-055 DATE: 4/92 SCALE: 1:1	THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF BOULD INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF BOULD INC.	
IDENTIFICATION NO. 1 REVISION PDB		05B0306	