

REV	DESCRIPTION	DATE	APPD
0	RELEASED	10/24/70	



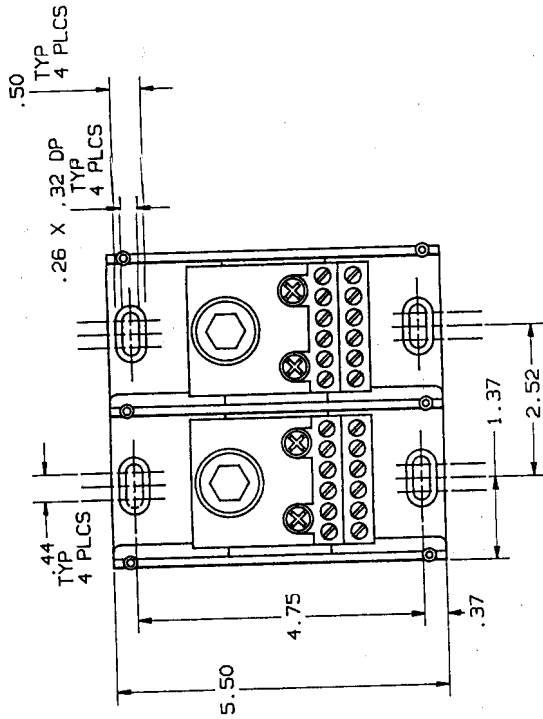


TABLE I

P/N	WIRE RANGE & TORQUE (IN-LBS)				U/L		CSA
	PRIMARY		SECONDARY				
	RANGE	TORQUE	RANGE	TORQUE	FILE NO.	GUIDE NO.	
68042	1000-250MCH	500	#4-#14	#4-#6 45 #8 40 #10-#14 35	E73571	XCFR2	LR69363
	1000-250MCH	780	#4-#14	#4-#6 40 #10-#14 35	E73571	XCFR2	LR15469

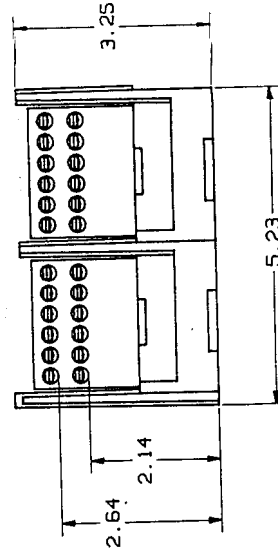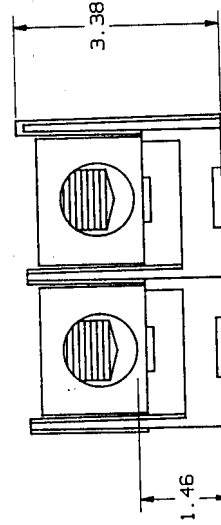

REFERENCE

MAR 16 1992

P/N 68042 (CU ONLY)
P/N 69042 (CU-AL)

GOULD SHAWMUT GOULD SHAWMUT 10000 RIVERSIDE FARMER, TX 78654		PRODUCT TITLE PDB. (1)1000-250MCH X (12) #4-#14 2 POLE 600V	
DATE 10/24/70		DATE 10/24/70	
SIGNATURE [Signature]		SIGNATURE [Signature]	
DATE 10/24/70		DATE 10/24/70	
SCALE 3/4		SCALE 3/4	
FILE NO 05C0286		FILE NO 05C0286	
REV 00		REV 00	

1. MATL COMPOSITION AND RATING: BASE-POLYCARBONATE-125°C RTI
CONNECTOR-ALUMINUM OR COPPER ALLOY-TIN PLATED.

NOTES: UNLESS OTHERWISE SPECIFIED