


REV	DATE	ECO	DESCRIPTION	BY	CK	APP
-	8/6/03	N/A	INITIAL RELEASE	LAS	N/A	N/A

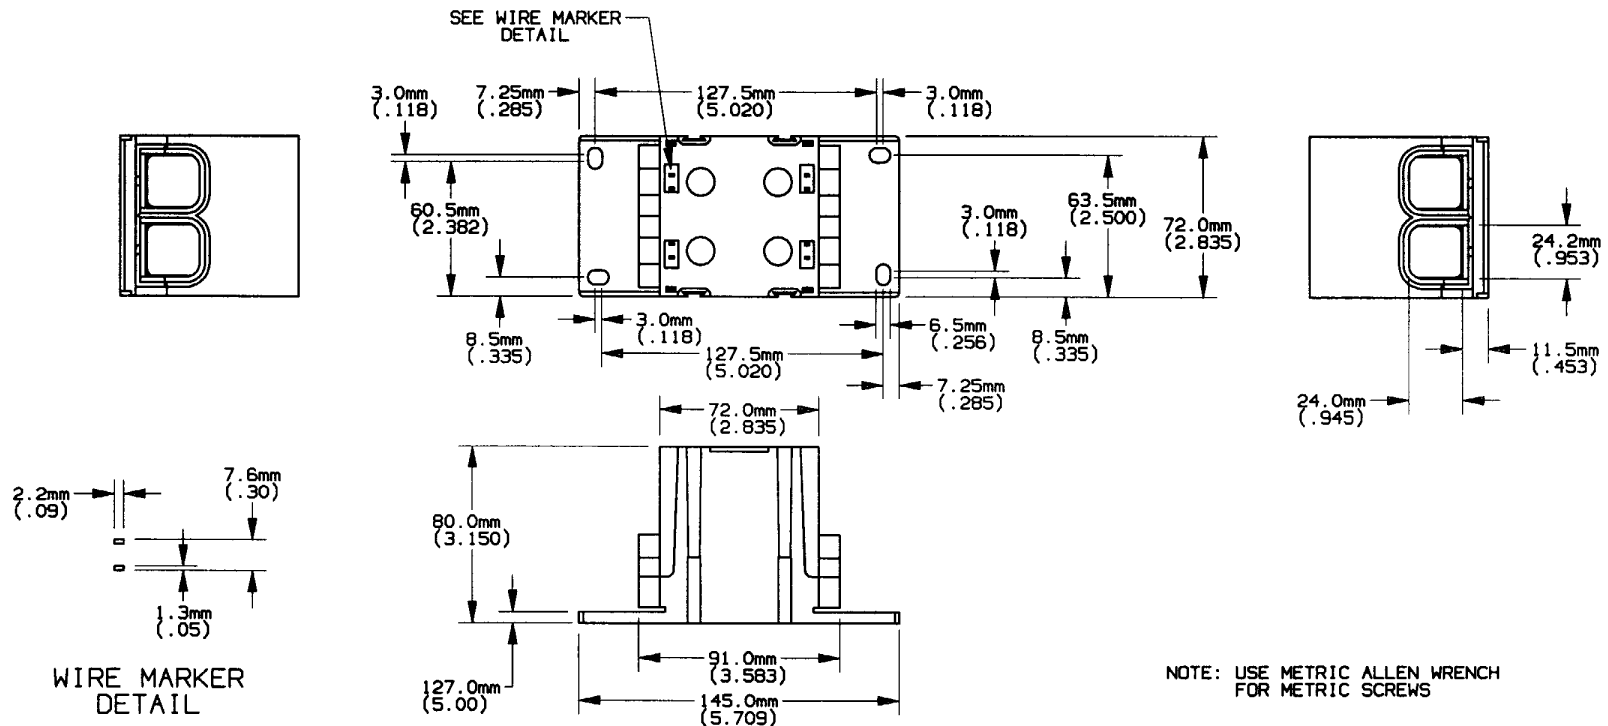

P/N	CONN. MAT'L.	AMP RATING	LINE				LOAD				UL		CSA	
			RANGE	TORQUE	RANGE	TORQUE	RANGE	TORQUE	RANGE	TORQUE	FILE #	GUIDE #	FILE #	CLASS
			AWG/kcmil	in/lbs	mm ²	N-m	AWG/kcmil	in/lbs	mm ²	N-m				
FSPDBSA	AL	420	600-#4	600-500 310 400-00 220 0-#2 170 #3-#4 130	300-25	300-240 35.1 185-70 24.9 50-35 19.2 25 14.7	600-#4	600-500 310 400-00 220 0-#2 170 #3-#4 130	300-25	300-240 35.1 185-70 24.9 50-35 19.2 25 14.7	E73571	XCFR2	69363	6228
FSPDBSC	Cu	420	600-#4	600-500 310 400-00 220 0-#4 90	300-25	300-240 35.1 185-70 24.9 50-25 10.2	600-#4	600-500 310 400-00 220 0-#4 90	300-25	300-240 35.1 185-70 24.9 50-25 10.2	E73571	XCFR2	69363	6228

Ferraz Shawmut

 FERRAZ SHAWMUT INC.
 374 MERRIMAC STREET
 NEWBURYPORT, MA 01950

PRODUCT MANAGER

DESIGN ENGINEER

SIGN:

Michael J. [Signature]

SIGN:

Moses [Signature]

DATE:

6-14-04

DATE:

6/14/04

 FINGER-SAFE
 POWER DISTRIBUTION BLOCK
 600V

 (2) 600-#4 X (2) 600-#4
 (2) 300-25mm² X (2) 300-25mm²

 OUTLINE DIMENSIONS
 NOT TO BE USED FOR PRODUCTION

701005